


EXELRAD KIT SETS

6B.—Six Valve Broadcast with Magic Eye optional.

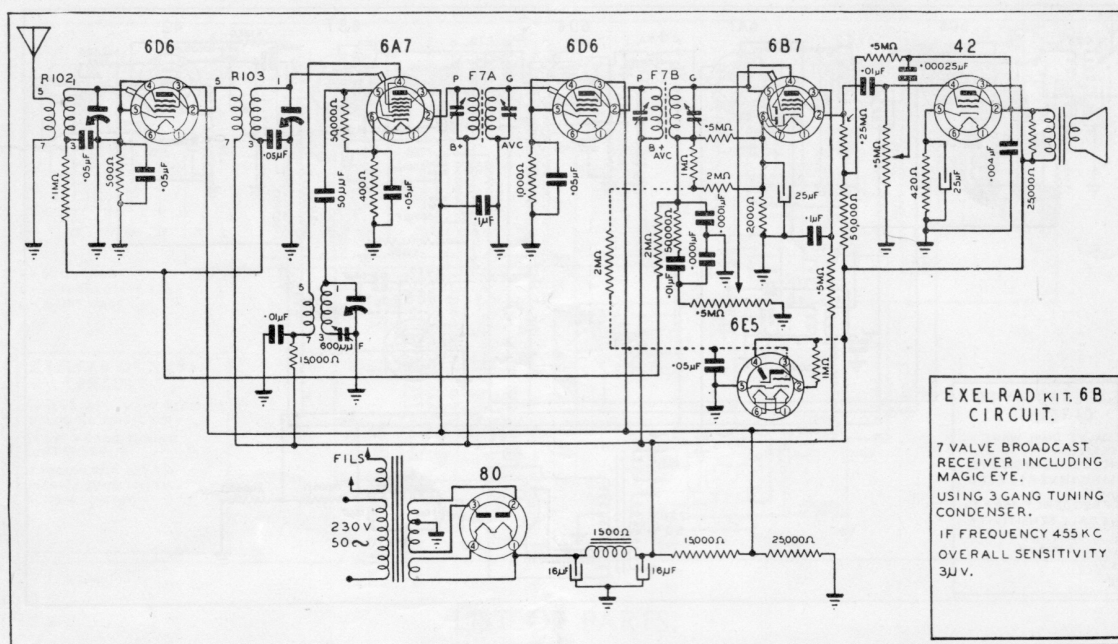

EXELRAD KIT, 6B
CIRCUIT.

7 VALVE BROADCAST
RECEIVER INCLUDING
MAGIC EYE.
USING 3 GANG TUNING
CONDENSER.
IF FREQUENCY 455 K.C.
OVERALL SENSITIVITY
3μV.

LIST OF PARTS.

- 1 New design Dial
- 1 3-gang tuning condenser 1791B
- 2 4-pin valve sockets
- 3 6-pin valve sockets
- 2 7-pin valve sockets
- 4 Rubber grommets
- 4 Washers for grommets
- 4 Spacers for grommets
- 2 16 mf metal electros 500v. wet
- 2 25 mf paper electros 25v. dry
- 1 600 mmf padder condensers
- 1 .004 mf mica cond., 1000v.
- 1 .00025 mf mica cond.
- 2 .0001 mf mica cond.
- 1 .00005 mf mica cond.
- 3 25 mmf trimmers, M 3760
- 2 .1 mf paper condrs. 350v.
- 5 .05 mf paper condrs. 350v.
- 3 .01 mf paper condrs. 350v.
- 2 .5 meg. variable controls
- 2 2 meg. carbon resistors $\frac{1}{4}$ watt
- 1 1 meg. carbon resistors $\frac{1}{4}$ watt
- 3 .5 meg. carbon resistors $\frac{1}{4}$ watt
- 1 .25 meg. carbon resistors $\frac{1}{4}$ watt
- 1 .1 meg. carbon resistors $\frac{1}{4}$ watt
- 3 50,000 ohm resistors, carbon $\frac{1}{4}$ w.
- 1 2,000 ohm resistors, carbon $\frac{1}{4}$ w.
- 1 1,000 ohm resistors, carbon $\frac{1}{4}$ w.
- 1 500 ohm resistors, carbon $\frac{1}{4}$ w.
- 1 400 ohm resistors, carbon $\frac{1}{4}$ w.
- 2 25,000 ohm resistors, carbon 1 w.
- 2 15,000 ohm resistors, carbon 1 w.
- 1 420 ohm resistors, carbon 1 w.

Tung-Sol Valves: 2x6D6; 1x6A7; 1x6B7; 1x42; 1x80.

EXTRA FOR MAGIC EYE.

- 1 .05 paper condenser 350v.
- 1 2 meg. carbon resistor $\frac{1}{4}$ watt
- 1 1 meg. carbon resistor $\frac{1}{4}$ watt
- 1 6 pin magic eye socket
- 1 4 wire cable
- 1 6E5 valve

COILS

- 1 R102 High Gain
- 1 R103 High Gain
- 1 R104 High Gain
- 1 F7A Iron Cored High Gain
- 1 F7B Iron Cored High Gain
- 4 Small valve shields
- 1 Large valve shield
- 1 15,000 w. speaker with 4-pin plug
- 1 Power transformer
- 1 3 core power flex
- 4 Control knobs
- 1 Chassis

Hook-up wire. Shielded leads. Nuts and Bolts. Grid Caps. Warning Plate, Spaghetti, etc.

- 1 3-gang condenser Mounting Bracket

PRICE COMPLETE—LESS MAGIC EYE	£15 15 0
PRICE COMPLETE—WITH MAGIC EYE	£16 10 0
PRICE COMPLETE—LESS VALVES	£13 15 0
PRICE COMPLETE—LESS VALVES & SPEAKER	£12 5 0

FOR BEST RESULTS USE ONLY TUNG-SOL VALVES