



**MODELS 1410B**

**1410G**

# SERVICE MANUAL

## PORTABLE SUPERHET BATTERY RECEIVER

**MODELS 1410B - BLUE  
1410G - GREY**



### CONTENTS

	Page		
Specification	2	Voltage Table	6
Circuit Description	2	Transistor Bias Adjustment	7
Dismantling	2	Hints on Servicing Transistors	7
Replacing Batteries	3	Spare Parts List	8
Alignment	6		

**COPYRIGHT AND REPRODUCTION OF DIAGRAMS STRICTLY RESERVED**

# SPECIFICATION

## Physical

Height 5  $\frac{3}{4}$  inches  
Width 7  $\frac{1}{2}$  inches } Approx.  
Depth 2  $\frac{3}{4}$  inches } Overall.  
Weight 2  $\frac{1}{4}$  lbs. (including Batteries) Approx.

## Battery Supply

H.T. 67.5 volts (Ever Ready Type BL39).  
L.T. 4.5 volts (Three Ever Ready Type U11).

## Consumption

H.T. 4.5 mA  
L.T. 30 mA No Signal  
40 mA Average Signal } Approx.

## Wave Ranges

M.W. 200-550 m (1500-545 kc/s)  
L.W. 1000-2000 m (300-150 kc/s)

## Intermediate Frequencies

470 kc/s

## Valves

V1 DK96 Frequency Changer  
V2 DF96 I.F. Amplifier  
V3 DAF96 Detector A.G.C. and A.F. Amplifier

## Transistors

TRA1 OC72 } Push-Pull Output Stage  
TRA2 OC72 } (Matched Pair)

## Aerial

Internal Ferrite Rod

## Rated Output

215 mW

## Loudspeakers

2  $\frac{1}{2}$ -inch High Flux Density, Permanent Magnet Type. The speech coil has a D.C. Resistance of  $2\frac{1}{2}$   $\Omega$ , and an impedance of  $3\Omega$  at 1000 c/s.

## CIRCUIT DESCRIPTION

The signals are fed via the Waveband switch (SW1) direct to the grid of V1. M.W. and L.W. coils are tuned by VCL of the gang capacitor. The local oscillator section of V1 is grid tuned by L5 and VC2, and is inductively coupled by L6 to the oscillator anode. The resultant I.F. signal is inductively coupled to the grid of V2 (I.F. Amplifier) via IFTL.

Output from V2 (DF96) is coupled via IFT2 to the diode section of V3; the intermediate frequency is filtered by C12-R8-C13. The resultant filtered A.F. signal developed across RVL is coupled via isolating capacitor (C14) to the grid of the pentode section of V3 (A.F. amplifier). A.G.C. is developed across R8-RVL filtered by R7-C10 and is fed via aerial coils L1-L2 to the grid of V1.

V3 (DAF96) amplifies the A.F. signal which is fed via the interstage transformer (TR1) to the bases of TRA1 and TRA2; base bias is provided by the voltage drop across the Bias control (RV2).

Transistors TRA1 and TRA2 are used as a quiescent push-pull output stage. R11 provides emitter bias and increases the stability of the transistors. Output from this stage is fed via the output transformer (TR2) to the loud-speaker (LS1).

## Battery Supplies

The H.T. supply is taken from one 67.5V battery and the L.T. from three 1.5V batteries.

The ON/OFF switch (SW2) disconnects the H.T. and L.T. negative supplies from the receiver.

## DISMANTLING

### Removal of Radio Chassis

1. To remove the tuning dial, place the thumb and fingers around the dial and carefully ease the dial off.
2. Hold the instrument firmly in the hand and release the back by way of the coin-slot provided on the underside of the cabinet, i.e. with the underside of the cabinet facing uppermost and the front facing away, insert coin into slot, gently press down and twist.

3. Disconnect the batteries.
4. Unsolder loudspeaker connection, and L.T. battery connection.
5. Loosen the screw securing the retaining plate located under the chassis in the centre of the cabinet, and slide the plate away from the chassis.
6. Withdraw the chassis from the cabinet.

**NOTE:** When replacing the chassis in the cabinet ensure that the wire link of the Wavechange switch sits in the "U" piece of the Wavechange knob assembly.

#### Removal of Loudspeaker

1. Remove radio chassis, operations 1,2,3, and 6 under "Dismantling".

2. Unsolder loudspeaker connections.

3. Carefully lever up in turn each centre piece of the spire nuts retaining the loudspeaker.

4. Withdraw loudspeaker assembly.

**NOTE:** Press the spire nuts flat before refitting.


## REPLACING BATTERIES

#### L.T. Cells

Remove the back of the cabinet (see under "Dismantling" para.2). Depress the spring and remove L.T. cells and replace with three new 1.5V Ever Ready cells type U11 as follows.

Remove and discard the cardboard cover of one of the cells. Position the cells as shown in

the diagram below and then slide the cardboard covers of the other two cells over the gap in order to form a 'tube'. Fit this 'tube' into the receiver cabinet so that the outer case of the end cell is in contact with the terminal spring and that the brass terminal of the top cell is in contact with the other terminal. See diagram below.

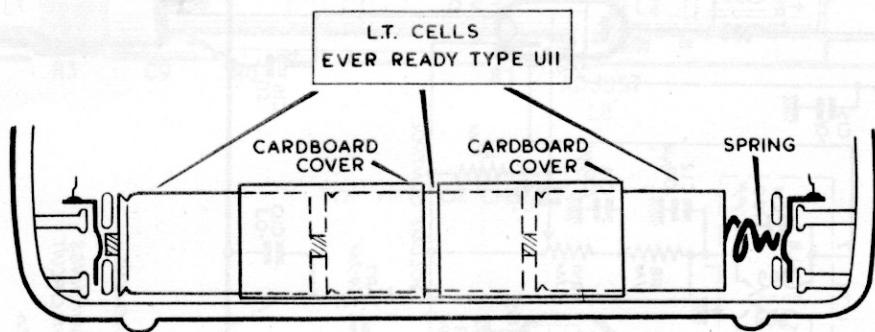


#### H.T. Cells

Withdraw battery from beneath rubber retaining band.

Remove stud and socket from battery terminals.

Replace with one Ever Ready type B139 67.5V battery and clip on the terminal stud and socket. To replace the back, hold the cabinet firmly and locate the upper edges together. Press on the lower edge.



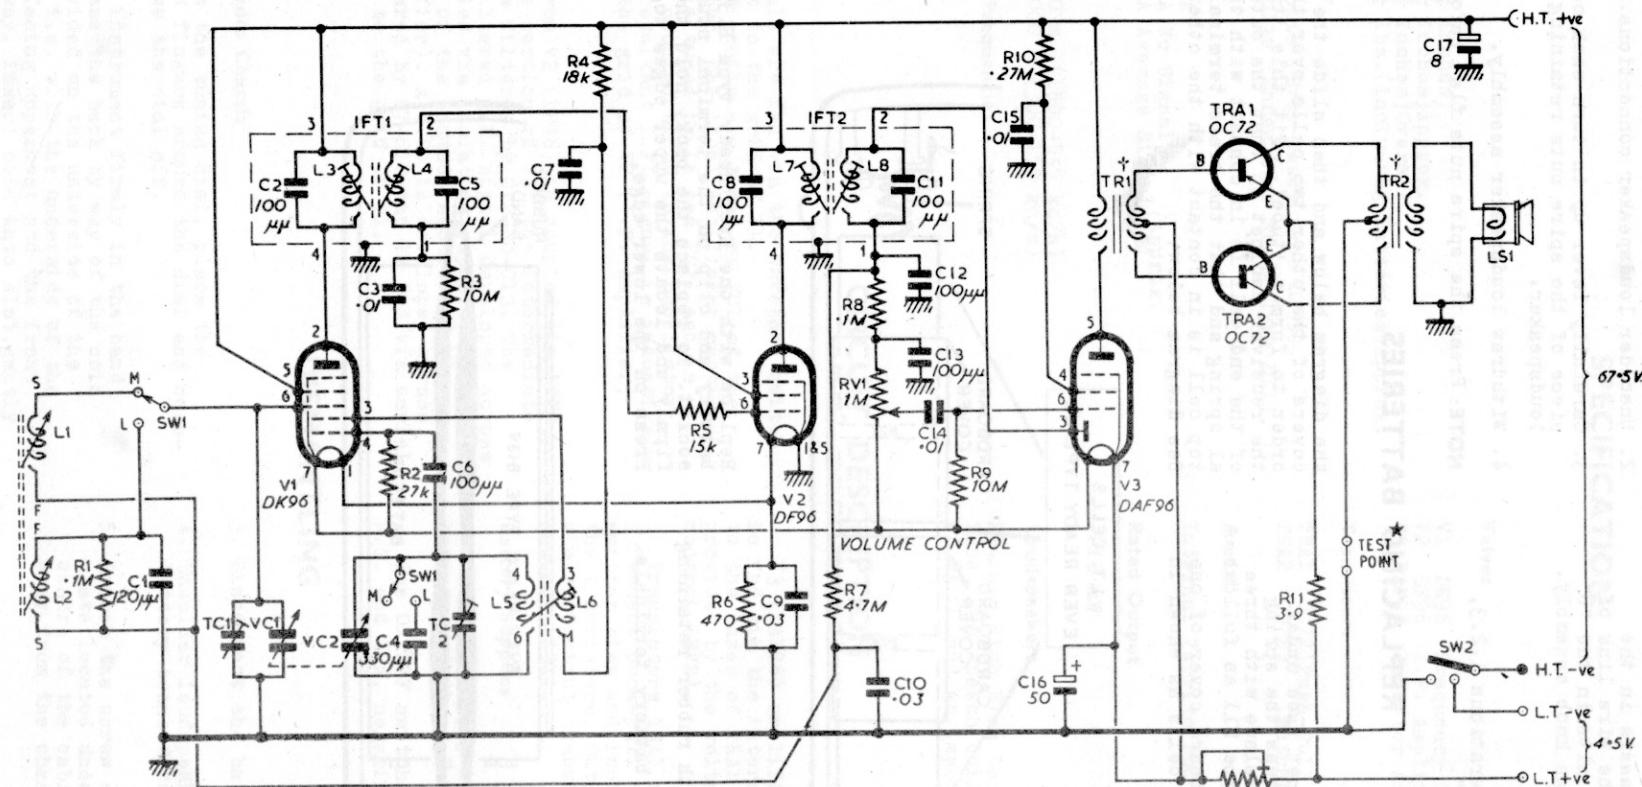

NOTE: RV1 SHOWN IN MAX. LEFT HAND POSITION OF KNOB.


\* TEST POINT MAY BE REMOVED FOR CURRENT MEASUREMENT  
DURING TRANSISTOR CHECKS.

† DO NOT USE A CONTINUITY TESTING DEVICE ON THE WINDINGS  
OF THESE TRANSFORMERS WITH THE TRANSISTORS IN CIRCUIT.


‡ ON EARLIER MODELS THE RESISTANCE OF RV2 IS 12Ω

TECHNICAL PUBLICATIONS DIVN. TP7328/1

CIRCUIT DIAGRAM - MODEL 1410 B & G

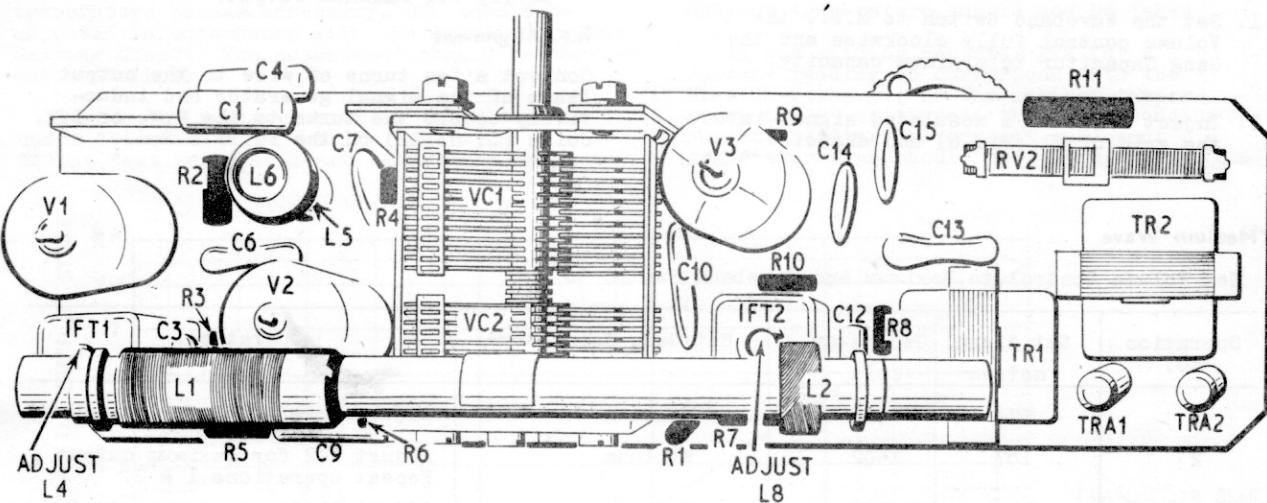

TOP VIEW OF CHASSIS

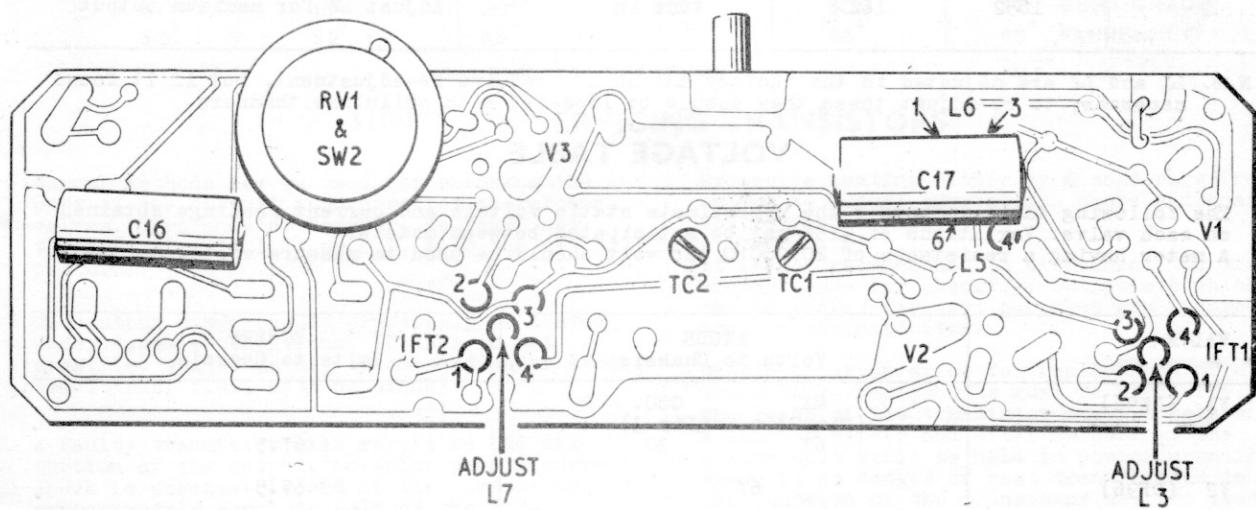

UNDERSIDE VIEW OF CHASSIS

## ALIGNMENT

### I.F. Alignment

- Set the Waveband Switch to M.W., the Volume control fully clockwise and the Gang Capacitor to minimum capacity.
- Inject a 470 kc/s modulated signal into the grid of V1 (Pin 6) and chassis.

3. Adjust cores of L8, L7, L4 and L3 consecutively for maximum output.

### R.F. Alignment

Connect a few turns of wire to the output leads of the signal generator and inductively couple the turns to the M.W. or L.W. coils (L1 or L2) on the Ferrite Rod.

### Medium Wave

Set Volume Control to Maximum and Waveband Switch to M.W.

Operation No.	Set Signal metres	Generator. kc/s	Set Gang Capacitors.	Operation.
1	574	522	Maximum	Adjust core of L5 for maximum output
2	187	1602	Minimum	Adjust TC2 for maximum output
3	510	588	Tune in	Repeat operations 1 & 2.
4	210	1427	Tune in	Adjust L1 for maximum output
				Adjust TC1 for maximum output
				Repeat operations 3 and 4

### Long Wave

Set Volume Control to Maximum and Waveband Switch to L.W.

Operation No.	Set Signal metres	Generator. kc/s	Set Gang Capacitors.	Operation
1	1852	162	Tune in	Adjust L2 for maximum output

N.B. L1 and L2 are adjusted in the factory and do not require re-adjustment, but if it found necessary to re-adjust these, they should be loosened with cellulose thinners.

## VOLTAGE TABLE

The following table indicates the approximate static voltage and current readings obtained on each valve. Variations of  $\pm 15\%$  may be anticipated between models. A meter having a resistance of 20,000  $\Omega$  per volt should be used to measure voltages.

VALVE	ANODE		SCREEN
	Volts to Chassis		
V1 (DK96)	MX. (Pin 2) 67	OSC. (Pin 3) 30	67.5
V2 (DF96)	67		67.5
V3 (DAF96)	65		50

### Transistors

TRAL } See Transistor Bias Chart for current check.  
TRA2 }

TOTAL H.T. CURRENT. 4.5 mA.  
TOTAL L.T. CURRENT. 40 mA.


## TRANSISTORS BIAS ADJUSTMENT

The preset Bias control (RV2) is adjusted at the factory and should not require further adjustment. If, however, replacement of the transistors becomes necessary, RV2 should be adjusted in accordance with the Transistor Bias Setting Chart. The adjustment should be carried out as follows :-

Remove the radio chassis as described under "Dismantling". Unsolder one side of the test point link and connect in ser-

ies a 0-10 mA meter. Switch the receiver on and position the tuner to a no-signal condition and volume control to minimum. The ambient temperature should now be taken.

Adjust sliding resistor RV2 for a current reading to correspond with the Bias Chart, e.g., if the ambient temperature is 20° centigrade the corresponding current reading for correct quiescent transistor bias should be 3.75 mA.

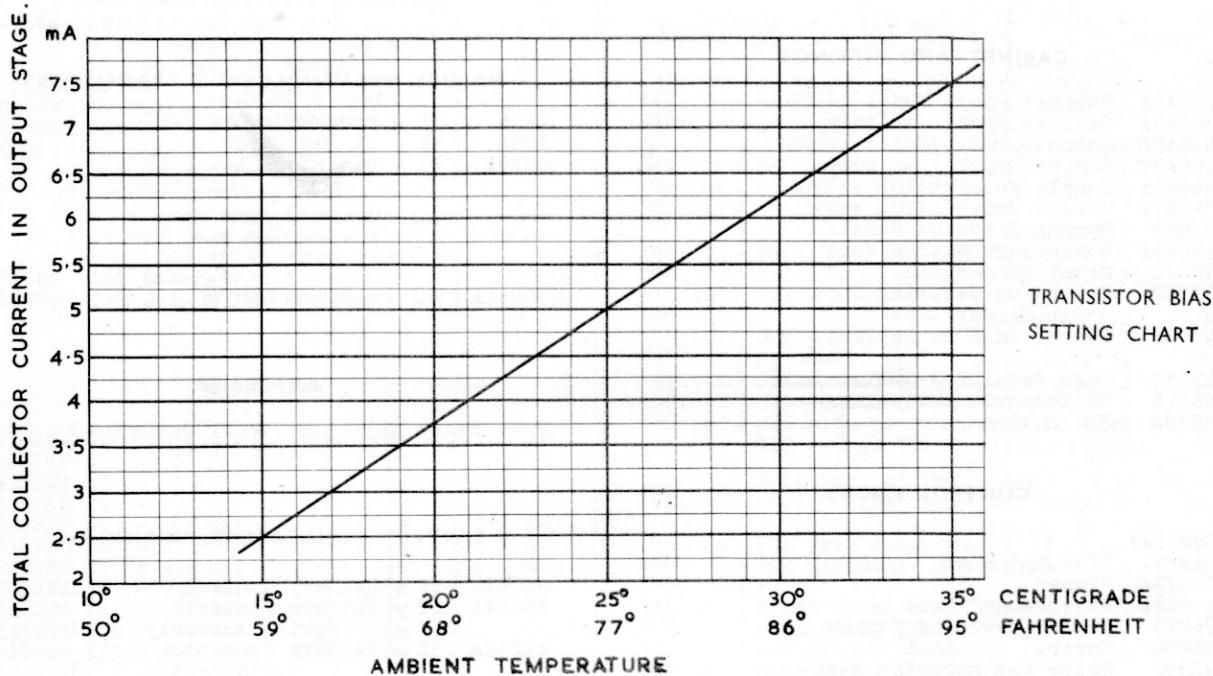

## HINTS ON SERVICING TRANSISTORS

Normal methods may be used for checking the part of the circuit incorporating thermionic valves. Care should, however, be taken not to short circuit L.T. or H.T. with the meter probe.

The output stage should preferably be tested under dynamic conditions. If this is not possible, the stage may be checked under static conditions, i.e., with no signal.

A faulty transistor will result in bad distortion of the output, in which case a current check is permissible and if the current is approximately equal to half of the total current through the collectors, then it is most probable that one of the transistors is faulty. As already mentioned in the "Specification", the transistors are of matched pairs, therefore, it is suggested that both transistors should be replaced with a new matched pair.

It is not recommended to use any continuity test meter on circuits incorporating transistors.

Excessive heating either by a soldering iron or due to excess current can cause a transistor to become faulty.

It is not recommended to disconnect the transistor leads for checking, but points which can be broken for test purposes are incorporated in the circuitry.

Should occasion arise for replacement of a transistor, heat shunts must be used, i.e., the leads of the transistor must be held with a pair of pliers and after soldering, the pliers must still be held in position until there is no danger of heat transference to the junction of the transistor and its leads (these junctions have extremely low temperature melting point).

In general, transistors are more rugged than normal thermionic valves but can be more prone to damage if handled carelessly. It can be emphasised however, that transistors be regarded as a reliable component and when a faulty receiver is being examined, the transistors should not be unduly suspected.

# SPARE PARTS LIST

PART NO.	DESCRIPTION	No. PER INST.	FIN- ISH	PART NO.	DESCRIPTION	No. PER INST.	FIN- ISH
<b>INSTRUCTIONS</b>							
96317	Instruction Card	1	00	See RVL	SW2 - ON/OFF Switch	-	-
96314	Cabinet Label	1	00	96057	Wire Switch - operating	1	689
96360	Guarantee Card	1	00	96058	link for S.W.1	1	689
96098A	Serial No. Label	1	00	10048	Washer on Switch -	1	689
					operating link for S.W.1	1	00
					Eyelet on Switch -		
					operating link for S.W.1	1	00
<b>CABINET AND FITTINGS</b>							
96048A	Cabinet Body } Model 1410B	1	00	<b>VALVES, VALVEHOLDERS &amp; TRANSISTORS</b>			
96049A	Cabinet Back } only	1	00	DK96	V1 - Frequency Changer	1	00
96048B	Cabinet Body } Model 1410G	1	00	DF96	V2 - IF Amplifier	1	00
96049B	Cabinet Back } only	1	00	DAF96	V3 - Detector, AGC & LF	1	00
96067A	Handle Model 1410B only	1	00		Amplifier	1	00
96067B	Handle Model 1410G only	1	00	(TRAL (Matched pair )			
96068	Spring Clips on Handle	2	00	96065A(	(Transistors )	1	00
96069A	Wavechange Slider Knob	1	00		(TRA2 { OC72 )		
96070	Metal Slider Link	1	689	96051A	Valveholders for V1,2 & 3.	3	00
92362	Spire Nut securing Knob						
	to Slider Link			<b>BATTERIES</b>			
93991	Rubber Band on Cabinet						
	Back	1	00	Ever Ready	B139 67.5v HT Battery	1	00
15159	Tags retaining Rubber Band	2	104	"	U11 1.5v LT Cells	3	00
96076	PK Screws securing Tags	2	689				
95896	HMV Emblem	1	00				
<b>CONTROL KNOBS</b>							
See RVL				<b>BATTERY CONNECTORS, WIRING Etc.</b>			
Assy.	"Volume" Knob	1	00	96064	LT + Battery Contact	1	454
96077A	"Tune" "	1	00	96064A	LT - Battery Contact		
96069A	"Wavechange" Knob	1	00		Spring Assembly	1	00
96079	Pin )securing Tuning	1	689	41232A	HT + Battery Connector		
96080	Spring) Knob	1	00		Socket	1	00
92362	Spire Nut securing Wave- change Knob	1	00	41229A	HT - Battery Connector Stud	1	00
96229	Felt Washers on Tuning Spindle	2	00	143/404/	PVC covered connecting		
				230 - 9	wire 1/024	-	-
				144/401/	Flexible PVC covered		
				040 - 9	connecting wire 14/.0048		
					(Battery Leads, etc.)	-	-
<b>LOUDSPEAKER</b>							
96072A	Loudspeaker complete - 2½" Round	1	00	N.B. For colour required change last figure as per Standard Colour Code.			
96073	Spire Nuts securing loudspeaker	4	00	143/051/	240 24 SWG Tinned Copper Wire		
				141/401/	024 1 mm Yellow PVC Sleeving	-	-
				141/403/	508 4 mm Clear Sleeving	-	-
<b>CHASSIS ASSEMBLIES</b>							
96050B	Radio Unit complete	1	00	<b>INDUCTORS</b>			
96074	Clamp )securing Radio	1	689	92780B	L1 - MW Aerial Coil	1	00
96075	PK Screw)Unit in Cabinet	1	689	92770D	L2 - LW Aerial Coil	1	00
				92690B	L3) 1st. IF Transformer	1	00
					L4)		
<b>SWITCHES</b>							
96059A	SW1 - Wavechange Switch	1	00				
37465	PK Screw securing SW1	2	00				

PART No.	DESCRIPTION	No. PER INST.	FIN- ISH	PART No.	DESCRIPTION	No. PER INST.	FIN- ISH		
<b>Inductors (Continued)</b>									
92760B	L5 } Oscillator Coil (MW)	1	00	96062	Spacers } securing RVI	2	689		
	L6 }			200100N	Screws } Assembly to	2	689		
92690B	L7 } 2nd. IF Transformer	1	00	200410	Nuts } Printed Panel	4	689		
92693	Dust Iron Cores for IFT1			96063	Wiring Tags } Washers	2	00		
	& 2	4	00	210310		2	689		
92695A	Screening Can only for IFTS	2	00	96060B	RV2 - Preset Bias control (15 Ω)	1	00		
40907	Dust Iron Core for L5/6	1	00	<b>CAPACITORS</b>					
96056	Ferrite Rod for L1 & L2	1	00	38117TH	C1 - 120 μF 2% 750v	1	00		
12613	Cleat securing Ferrite Rod to Paxolin Panel	1	689	38014TF	C2 - 100 μF 2% (See IFT1)	1	00		
200040G	Screw } securing Cleat	1	689	38109B	C3 - 0.01 μF -20%+80% 500v	1	00		
201804	SP Washer } to Panel	1	00	38492VK	C4 - 330 μF 2% 250v	1	00		
200404	Nut } supporting Ferrite Rod	1	689	38014TF	C5 - 100 μF 2% (See IFT1)	1	00		
96055A	Paxolin Panel Assy. -			38117DG	C6 - 100 μF 20% 750v	1	00		
	Screws securing Panel to Gang Capacitor	1	00	38109B	C7 - 0.01 μF -20%+80% 500v	1	00		
49825	Solder Tags only on Paxolin Panel	2	689	38014TF	C8 - 100 μF 2% (See IFT2)	1	00		
92800D	TR1 Interstage Transformer	1	513A	38137A	C9 - 0.03 μF -20%+80% 500v	1	00		
92800B	TR2 Output Transformer	1	513A	38137A	C10 - 0.03 μF -20%+80% 500v	1	00		
				38014TF	C11 - 100 μF 2% (See IFT2)	1	00		
<b>RESISTORS</b>									
33362EA	R1 - 100 kΩ 20%	1W	1	38117DG	C12 - 100 μF 20% 750v	1	00		
33362ND	R2 - 27 kΩ 10%	1W	1	38117DG	C13 - 100 μF 20% 750v	1	00		
33362EN	R3 - 10 MΩ 20%	1W	1	38109B	C14 - 0.01 μF -20%+80% 500v	1	00		
33362KG	R4 - 18 kΩ 10%	1W	1	38109B	C15 - 0.01 μF -20%+80% 500v	1	00		
33362BV	R5 - 15 kΩ 10%	1W	1	38420G	C16 - 50 μF Electrolytic 12v	1	00		
33362BL	R6 - 470 Ω 10%	1W	1	38420F	C17 - 8 μF Electrolytic 100v	1	00		
33362EL	R7 - 4.7 MΩ 20%	1W	1	See TC1 } Part of Twin Gang VCL & 2 TC2 } Tuning Capacitor Assy.			-		
33362EA	R8 - 0.1 MΩ 20%	1W	1	96052A	(VCL Twin Gang Tuning ) (VCL Capacitor Assembly)	1	00		
33362EN	R9 - 10 MΩ 20%	1W	1	96053	Front Metal End Plate supporting Gang Capacitor				
33362NE	R10 - 0.27MΩ 10%	1W	1	96054	and Switch Assembly	1	689		
37860LT	R11 - 3.9 Ω 10%	1W	1	200040D	Rear Metal End Plate supporting Gang Capacitor	1	689		
96061A	RVI - 1 MΩ volume control assembly complete with knob and ON/OFF switch	1	00	201804	Screws } securing Front SP Washers } & Rear Plates	4	689		