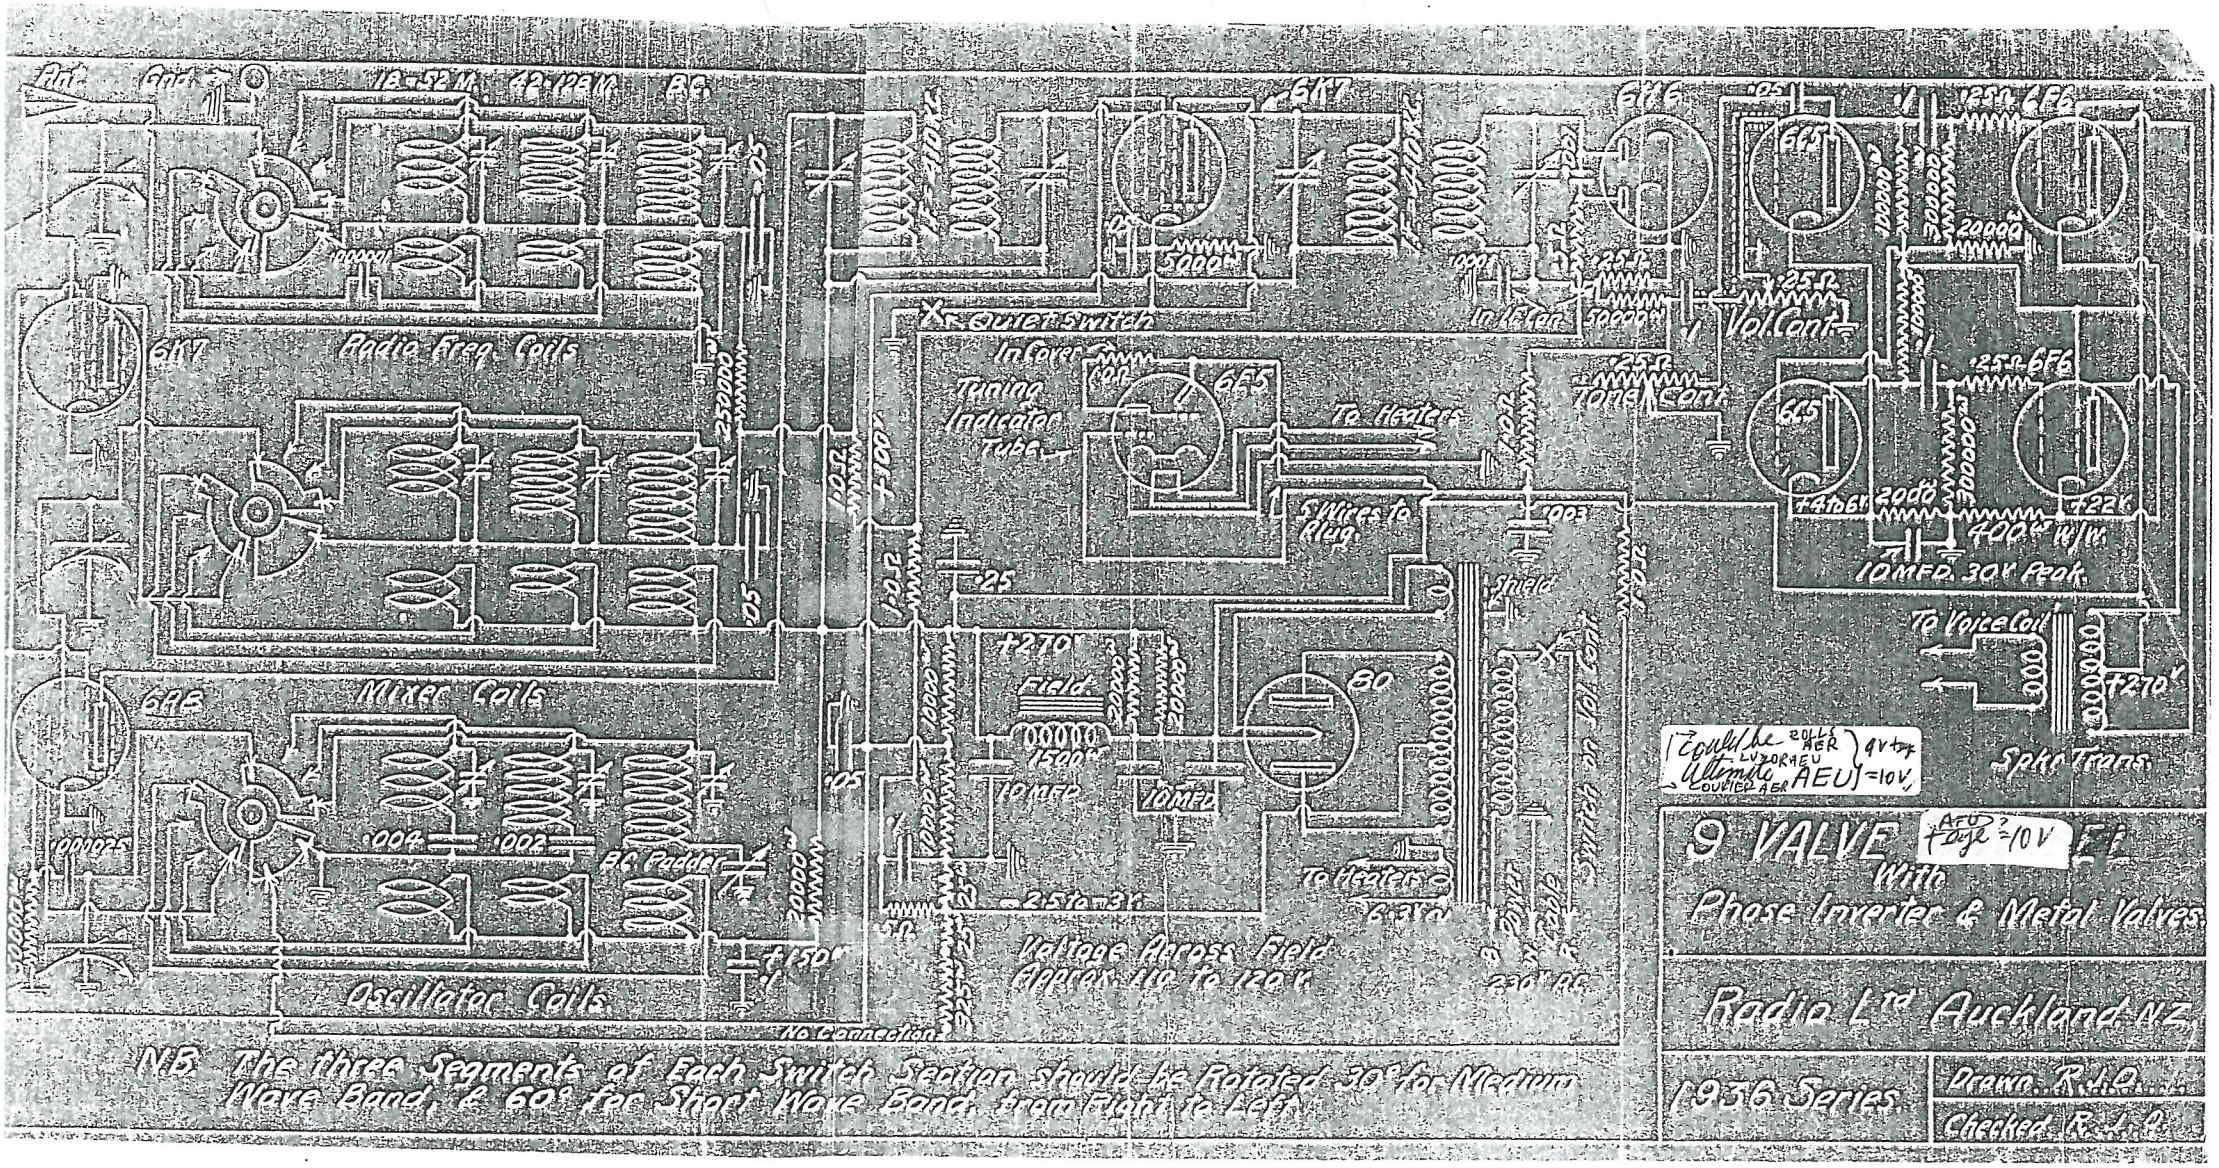
Plate
Grid
18-52 M
42-120 M
B.C.
6K7
6F6
6K7
Radio Freq. Coils
6A8
Mixer Coils
Oscillator Coils
B.C. Padder
Quiet Switch
In Series
Tuning Indicator Tube
6E5
To Heaters
5 Wires to Plug
Field
To Heaters
6.3 V
230 V A.C.
Voltage Across Field Approx 110 to 120 V
No Connection
Vol. Cont.
Tone Cont.
6F6
6G5
2000
400 Ω W/W.
10 MFD. 30 V Peak
To Voice Coil
Spkr Trans.
Could be 2 VOLT AER LV or AEU Ultimate COUPLED AER AEU } 4 V + 6 V = 10 V
AEU 4 V + 6 V = 10 V
9 VALVE E.I.
With
Phase Inverter & Metal Valves
Radio Ltd Auckland N.Z.
1936 Series
Drawn R.J.D.
Checked R.J.D.
N.B. The three Segments of Each Switch Section should be Rotated 30° for Medium Wave Band, & 60° for Short Wave Band from Right to Left

AEU 4V