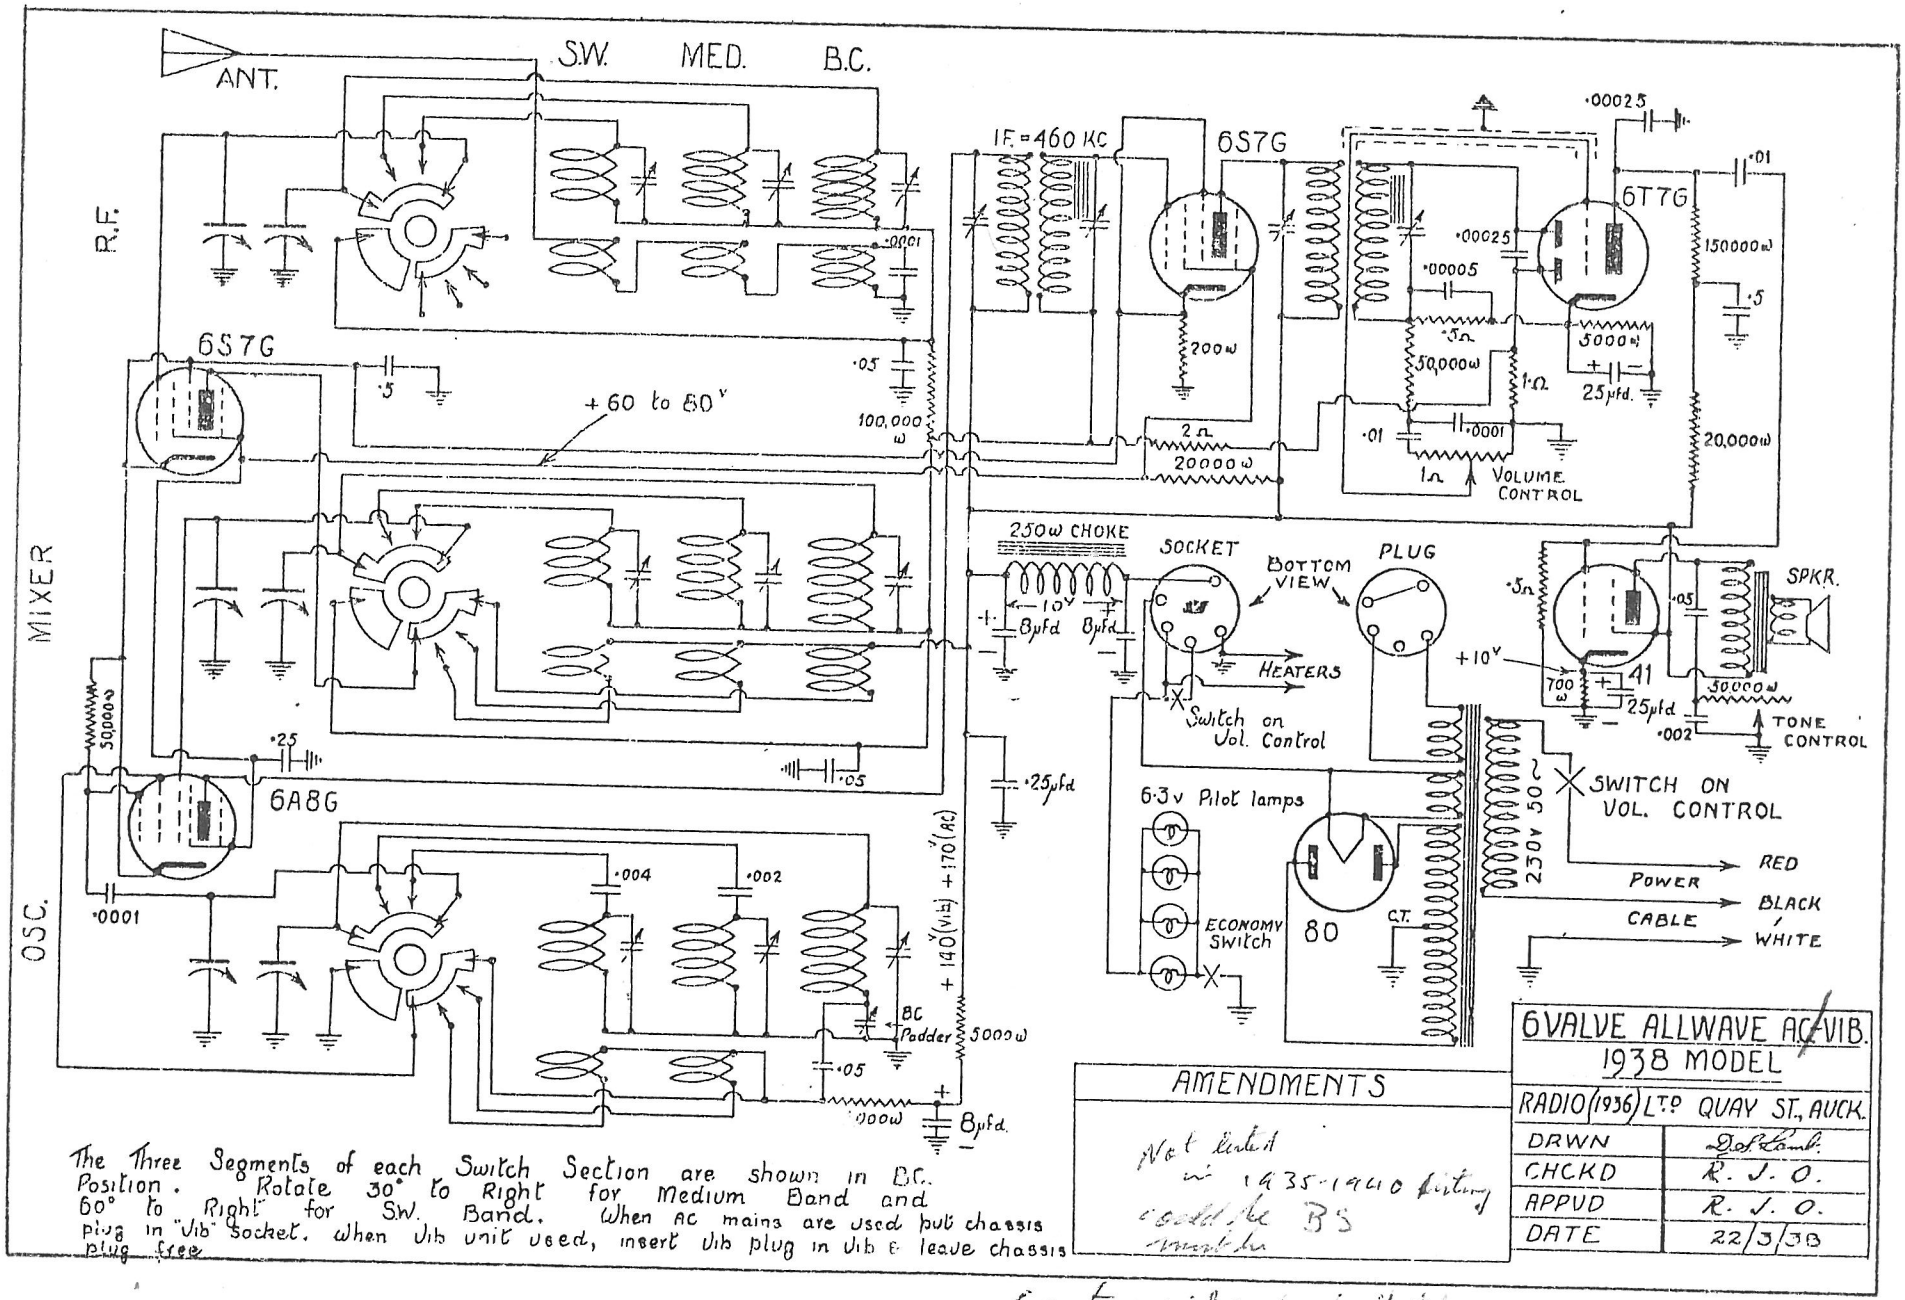

The Three Segments of each Switch Section are shown in B.C. Position. Rotate 30° to Right for Medium Band and 60° to Right for S.W. Band. When AC mains are used put chassis plug in "Vib" Socket. When Vib unit used, insert Vib plug in Vib & leave chassis plug free

AMENDMENTS
Not listed in 1935-1940 listing could be BS model

6 VALVE ALLWAVE AC/VIB. 1938 MODEL	
RADIO (1936) LTD QUAY ST., AUCK.	
DRWN	D.J. Lamb
CHCKD	R. J. O.
APPVD	R. J. O.
DATE	22/3/38

BS (1938)

contains vibpack & alt tubes

CID, CHF