





HIS MASTER'S VOICE

Service Sheet

ISSUED BY SERVICE DIVISION, HIS MASTER'S VOICE (N.Z.) LTD., G.P.O. BOX 296, WELLINGTON.

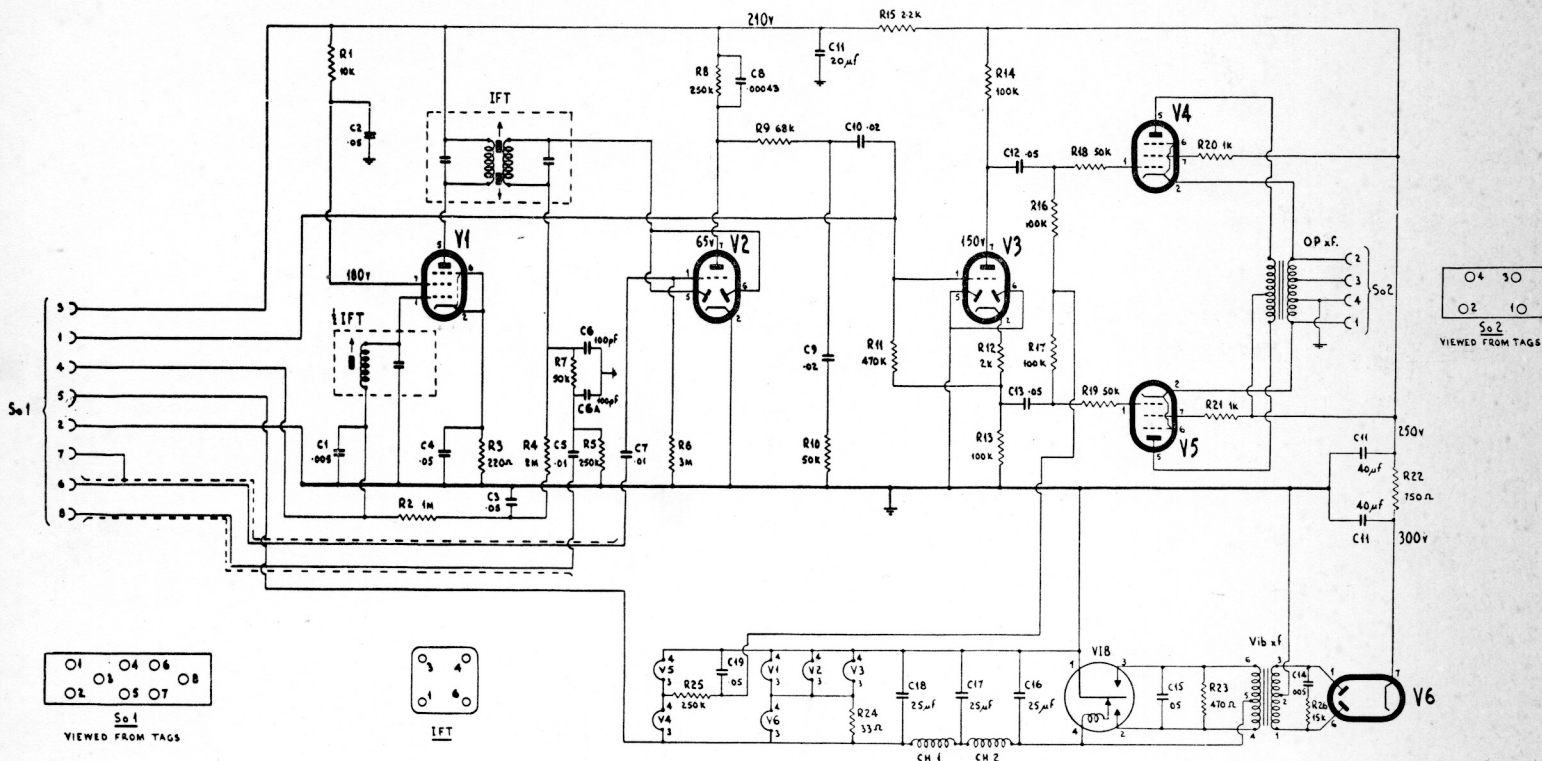

MODEL 536 AMP 8-VALVE RADIOMOBILE AMPLIFIER GBR 7/53.



CONDENSERS

RESISTORS

Item No.	Description	Store Part No.	Item No.	Description	Store Pt. No.
C1	.005 500v.	1500-w	R1	10k $\frac{1}{2}$ watt	1300-D7
C2, 3, 4, 12	.05 350v.	1500-A7	R2	1 meg. $\frac{1}{2}$ watt	1300-I8
13, 15, 19	.01 350v.	1500-B5	R3	220 ohm. $\frac{1}{2}$ watt	1300-S
C5,7	100 pfd. s.m.	1500-L2	R4	2 meg. $\frac{1}{2}$ watt	1300-J1
C6,6A	430 pfd. s.m.	1500-I	R5,8,25	250k. $\frac{1}{2}$ watt	1300-K4
C8	.02 350v.	1500-K2	R6	3.3 meg. $\frac{1}{2}$ watt	1300-J8
C9,10	.02 350v.		R7,10,18,19	50k. $\frac{1}{2}$ watt	1300-G2
C11	40-40-20 electro. 350v.	1500-N4	R9	68k. $\frac{1}{2}$ watt	1300-I9
C14	.005 800v.	1500-K1	R11	470k. $\frac{1}{2}$ watt	1300-N2
C16,17,18	25 mfd. 12w.v.	1500-E7	R12	2k. $\frac{1}{2}$ watt	1300-C6
Valves			R13,14,16,17	100k. $\frac{1}{2}$ watt	1300-G7
V1	W77	P31	R15	2.2k. 1watt	1300-M1
V2	DH77	P32	R20,21	1k. 1watt	1300-C4
V3	DH77	P32	R22	750 ohm. 5watt	1300-C1
V4	N78	P33	R23	470 ohm. 2watt	1300-B2
V5	N78	P33	R24	33 ohm. 5watt	1300-M9
V6	U78	P34	R26	15k. $\frac{1}{2}$ watt	1300-E4
Vx	Vibrator xfmr 12v. Beacon 50 R56	TR 33			
Ox	Output xfmr 10,000 ohm. DQL 44	TR 1100			
Vib	Vibrator 12v. Plessey 1214	VI 1122			
$\frac{1}{2}$ IFT.	1st I.F. transformer	46550 C.			
IFT.	2nd I.F. transformer	46551 C.			
CH1	L.F. choke	40937 E.			
CH2	L.F. choke	40937 E.			