


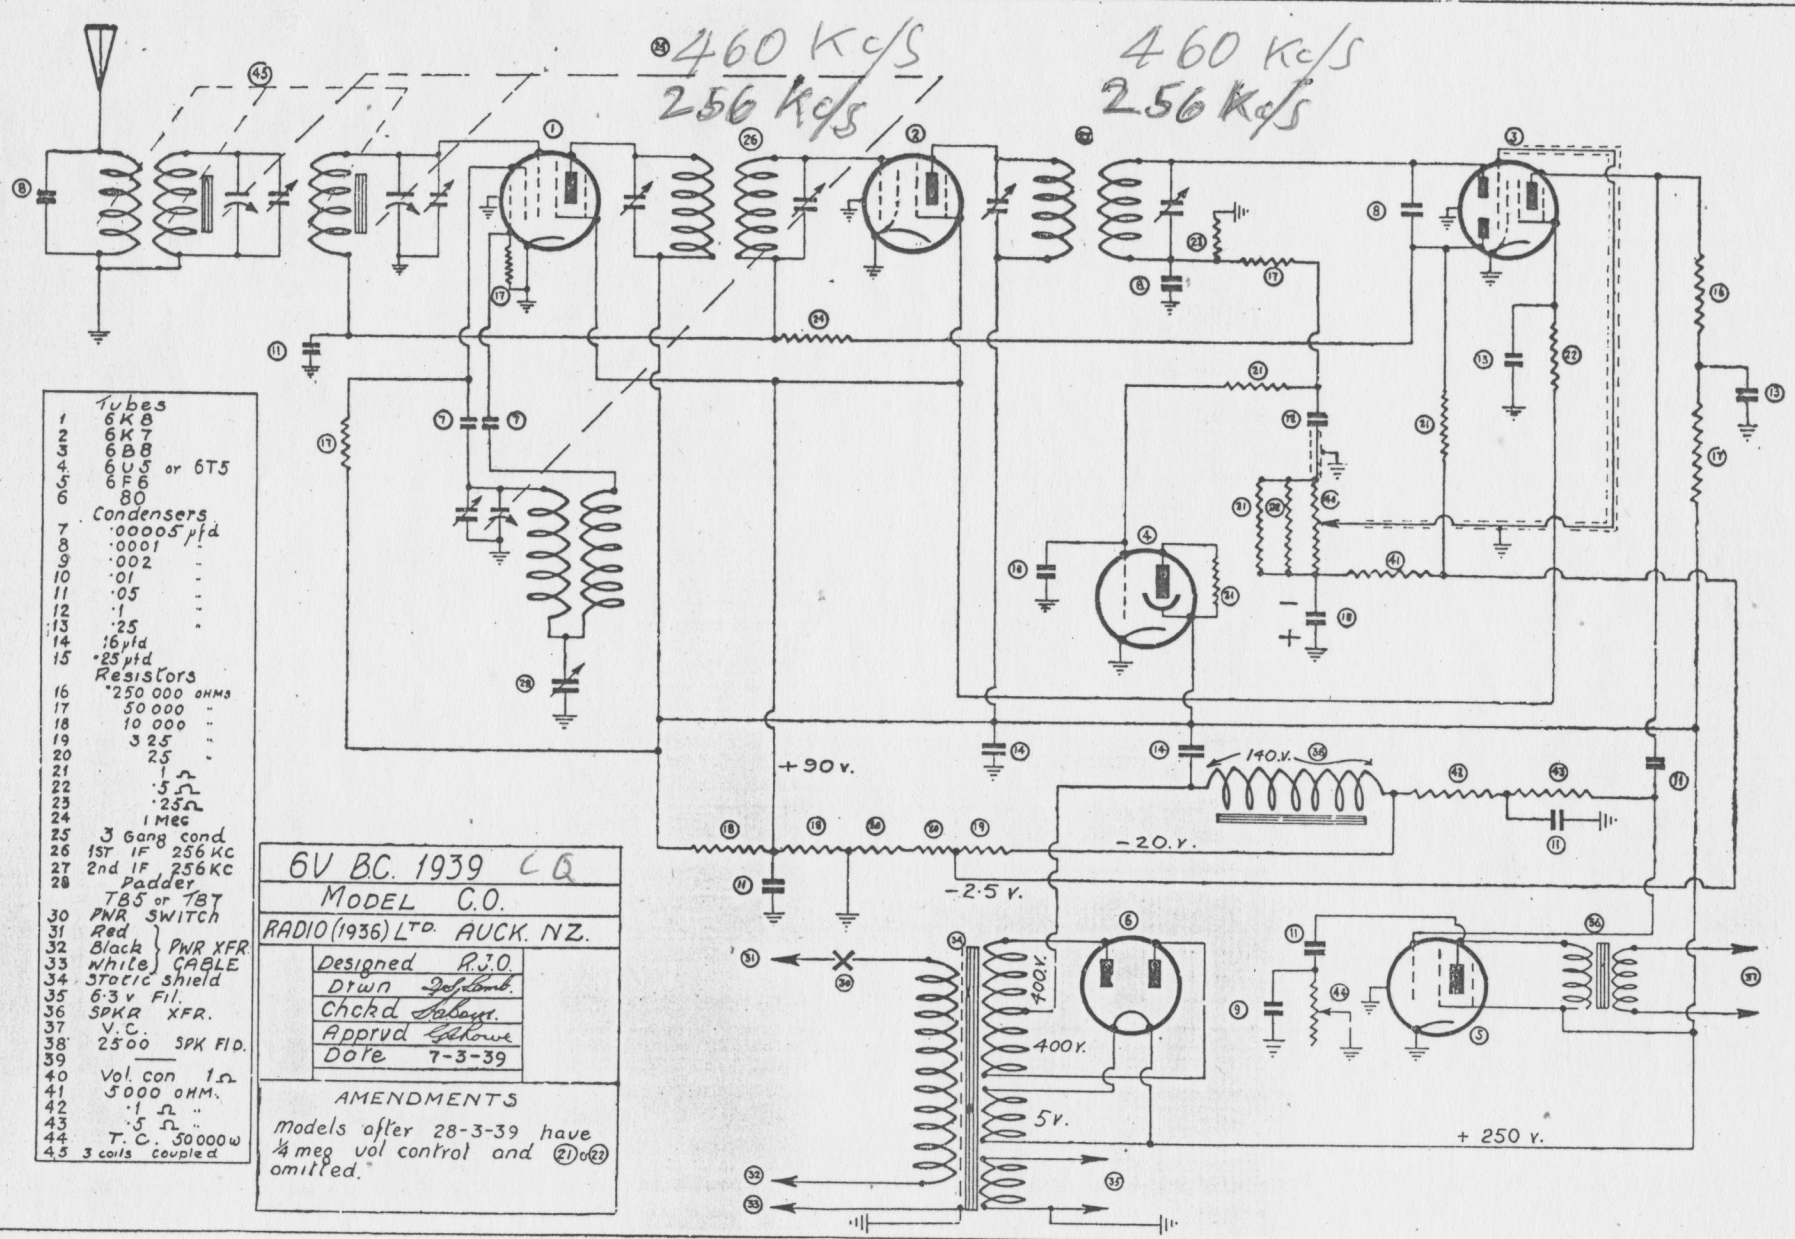

- Tubes**
- 1 6K8
 - 2 6K7
 - 3 6B8
 - 4 6F5 or 6T5
 - 5 6F6
 - 6 80
- Condensers**
- 7 .00005 pfd
 - 8 .0001
 - 9 .002
 - 10 .01
 - 11 .05
 - 12 .1
 - 13 .25
 - 14 .16 pfd
 - 15 .25 pfd
- Resistors**
- 16 250 000 OHMS
 - 17 50 000
 - 18 10 000
 - 19 3.25
 - 20 2.5
 - 21 1
 - 22 .5
 - 23 .25
 - 24 1 Meg
 - 25 3 Gang cond
 - 26 1st IF 256 KC
 - 27 2nd IF 256 KC
 - 28 Padder
 - 29 TB5 or TB7
 - 30 PNR SWITCH
 - 31 Red
 - 32 Black } PNR XFR
 - 33 White } CABLE
 - 34 STATIC shield
 - 35 6.3 v Fil.
 - 36 SPKR XFR.
 - 37 V.C.
 - 38 2500 SPK FID.
 - 39
 - 40 Vol. con 1
 - 41 5000 OHM.
 - 42 .1
 - 43 .5
 - 44 T.C. 50000W
 - 45 3 coils coupled

6V BC. 1939 C.O.

MODEL C.O.

RADIO (1936) LTD. AUCK. N.Z.

Designed R.J.O.

Drawn J. J. O.

Chkd. J. J. O.

Apprvd. J. J. O.

Date 7-3-39

AMENDMENTS


models after 28-3-39 have
4 meg vol control and (21) & (22)
omitted.

C.O.

Tubes	
1	6K7
2	6K8
3	6B8
4	6F6
5	6U5 (MAGIC EYE)
6	80
Condensers	
7	.00005
8	.0001
9	.0015
10	.002
11	.004
12	.02
13	.04
14	.05
15	.1
16	.25
17	.5
18	16 ufd
19	25 ufd
RESISTORS	
20	500000
21	250000
22	100000
23	50000
24	10000
25	2 MEG
26	1
27	1/2
28	325
29	25
30	ANT.
31	GND.
32	B.C.
33	MED.
34	SW.
35	B.C. Padder TB.5
36	1ST IF 460 KC.
37	2ND IF 460 KC.
38	PICKUP
39	2500W SPKR FLD.
40	SPKR
41	VOLUME CONTROL
42	100000
43	HEATERS 6.3V 100mA
44	SWITCH ON V.C.
45	RED
46	BLACK 230 AC.
47	WHITE
48	SHIELDING (STATIC)
49	1000

WAVE CHANGE SWITCH SHOWN IN B.C. POSITION

INVERSE FEED BACK INCORPORATED IN FIRST MODELS BUT ELIMINATED NOW.

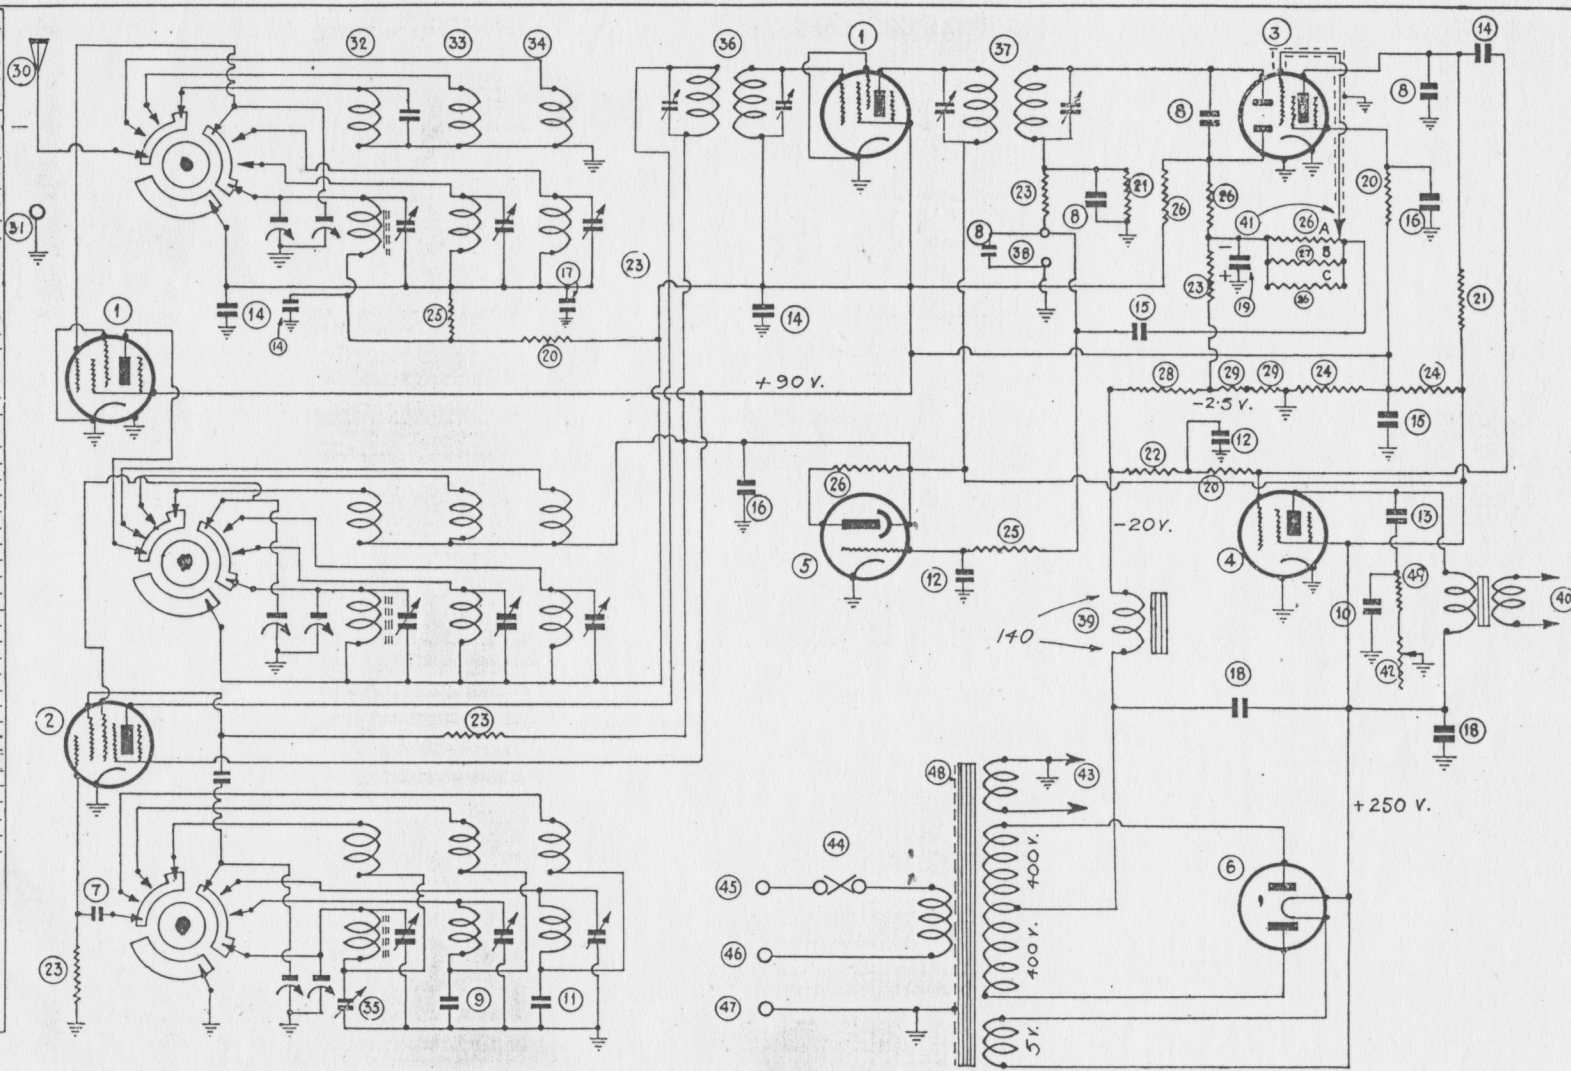

DRWN	7AW-AC 1939	AMENDMENTS
CHCKD	MODEL C.O.	sets issued after 28-3-39 have
APPRVD	RADIO (1936) LTD	4 meg in place of A B & C (vol. cont)
DATE	20-4-39	AUCK N.Z.

CO/CA