

ULTIMATE 10-Valve P.P. A.W. WITH SEPARATE POWER PACK

MODEL A
~~Model A~~
 had

- VALVES.
 1. 6K7
 2. 6K8
 3. 6H6
 4. 6U6
 5. 6J7
 6. 6V6G
 CONDENSERS
 7. .00005mfd
 8. .0001mfd


9. .0015mfd
 10. .002mfd
 11. .004mfd
 12. .02mfd
 13. .05mfd
 14. .1mfd
 15. .25mfd
 16. .5mfd
 17. 16mfd
 18. 25mfd

- RESISTORS.
 19. 2 meg.
 20. 1 meg.
 21. $\frac{1}{2}$ meg.
 22. $\frac{1}{4}$ meg.
 23. 100,000 ohms
 24. 50,000 ohms
 25. 10,000 ohms
 26. 5,000 ohms
 27. 2,000 ohms

28. 200 ohms
 29. 25-25 ohms
 GENERAL
 30. Ant
 31. Gnd.
 32. B.C.
 33. Med.
 34. S.W.
 35. B.C. pad. TB5
 36. 1st IP 460 K.C.

37. 2nd IP 460 K.C.
 38. Pickup
 39. Spkr. field 1500 ohms
 40. Speaker
 41. Vol. Control 1 meg.
 42. Tone Control 250,000
 43. Bass compens.
 44. 6.3 filaments
 X Switch on Vol Control

AMENDMENT. 41-20-21 (Vol. Control now a single $\frac{1}{2}$ meg.

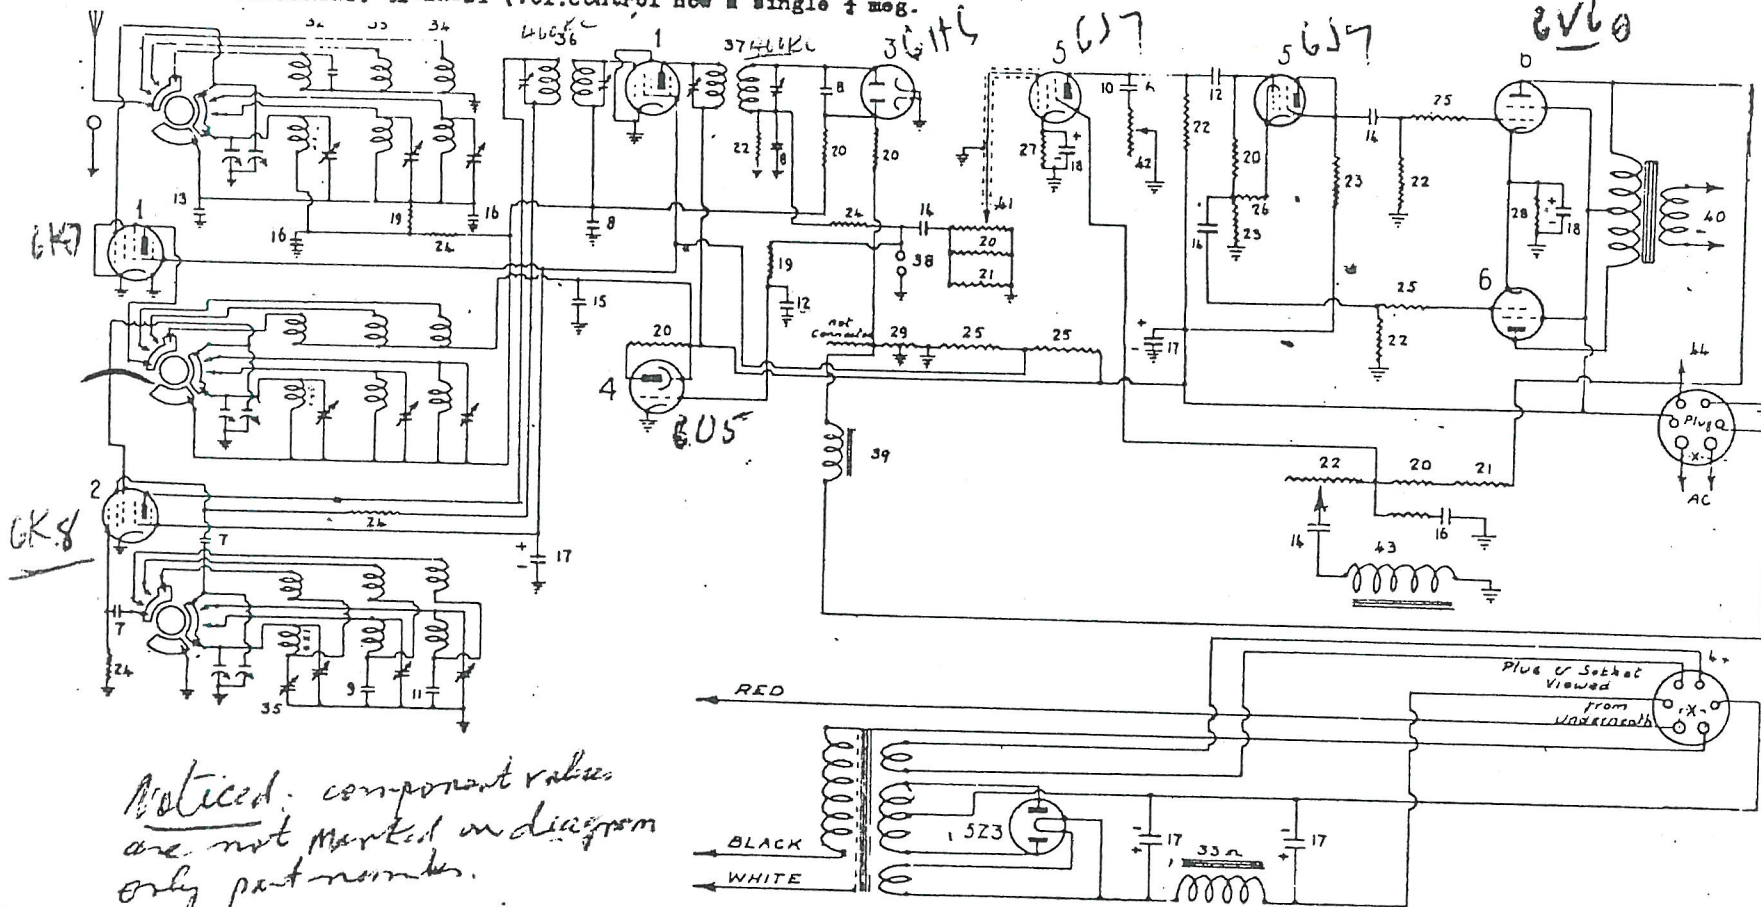

Noticed: component values
 are not marked on diagram
 only part numbers.
 This practice was introduced
 in 1939

285

BNE. Co.

AF