

4 Volve Superhiet



Rectifier valve
mounted on top
of power transformer.

165 kc


Receiver Employs:

1. RF preselection
2. Single IF xfrmt at 165 KHz
3. Preset detector sensitivity
4. 2 pos. volume tone control.

A-G-K. 1993

ULTIMATE Model 4LL Chassis Layout

4 Valve Superhet

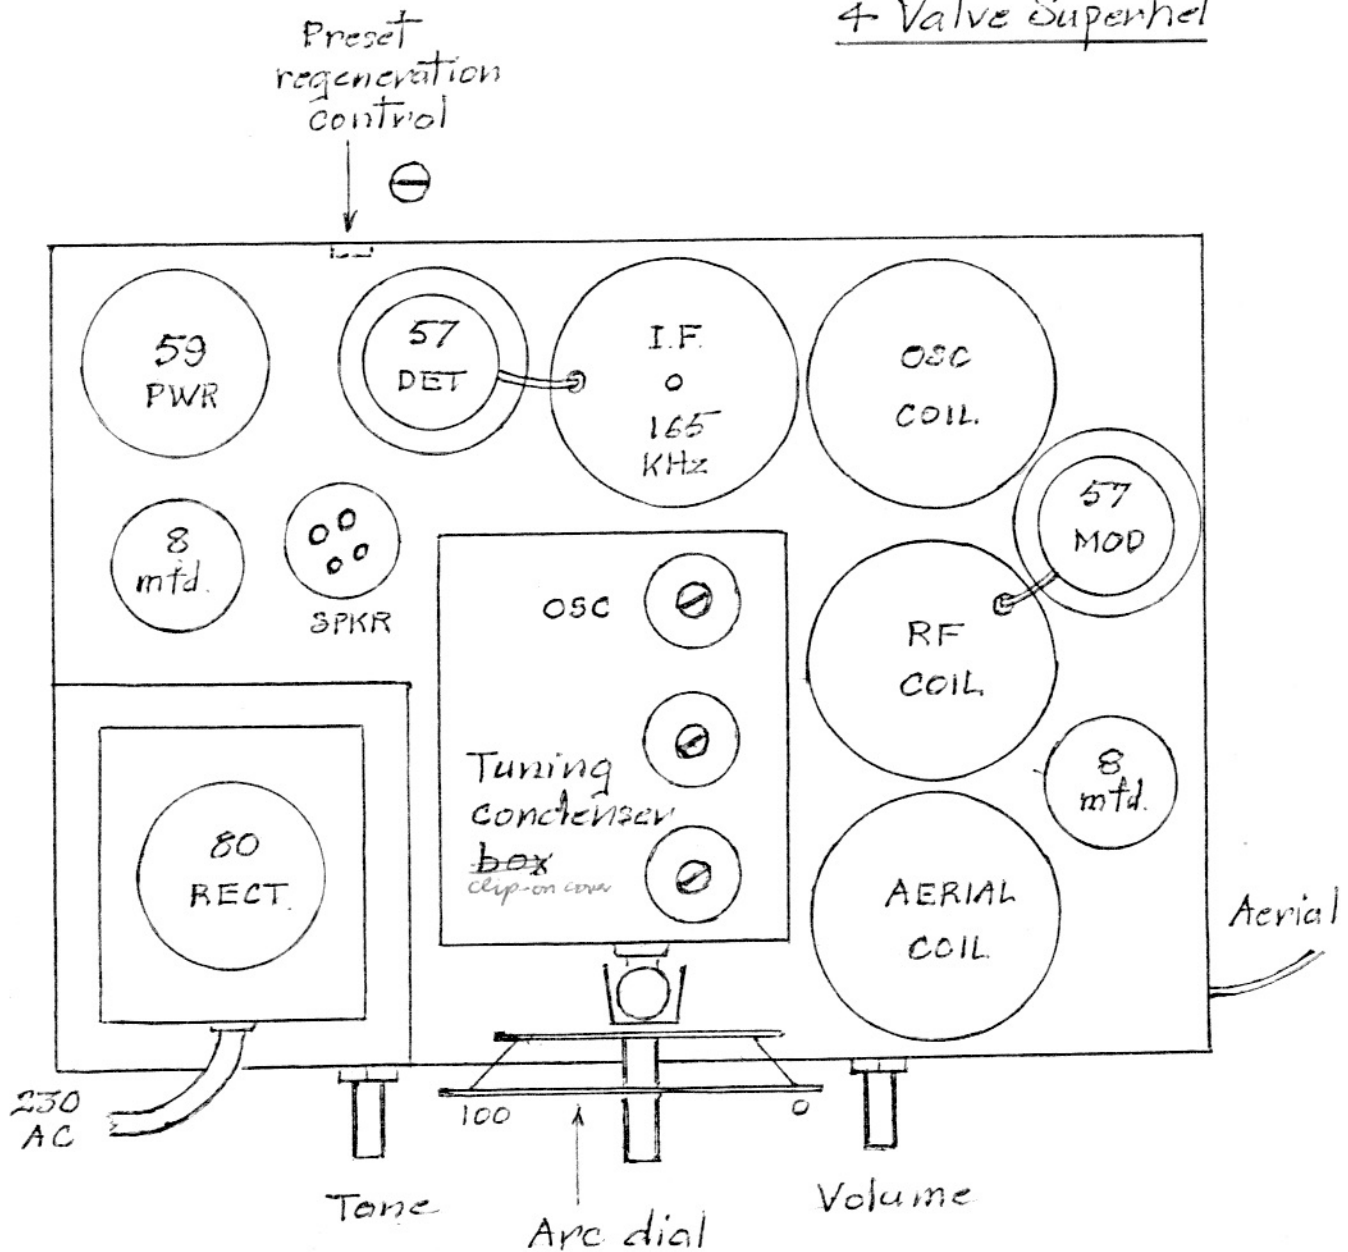

Receiver employs :-

- (a) RF preselection & single winding RF coil
- (b) Single IF Transformer at 165 KHz (171 kHz?)
- (c) Preset detector regeneration
- (d) Detector grid leak components mounted inside IF can (at top).

