



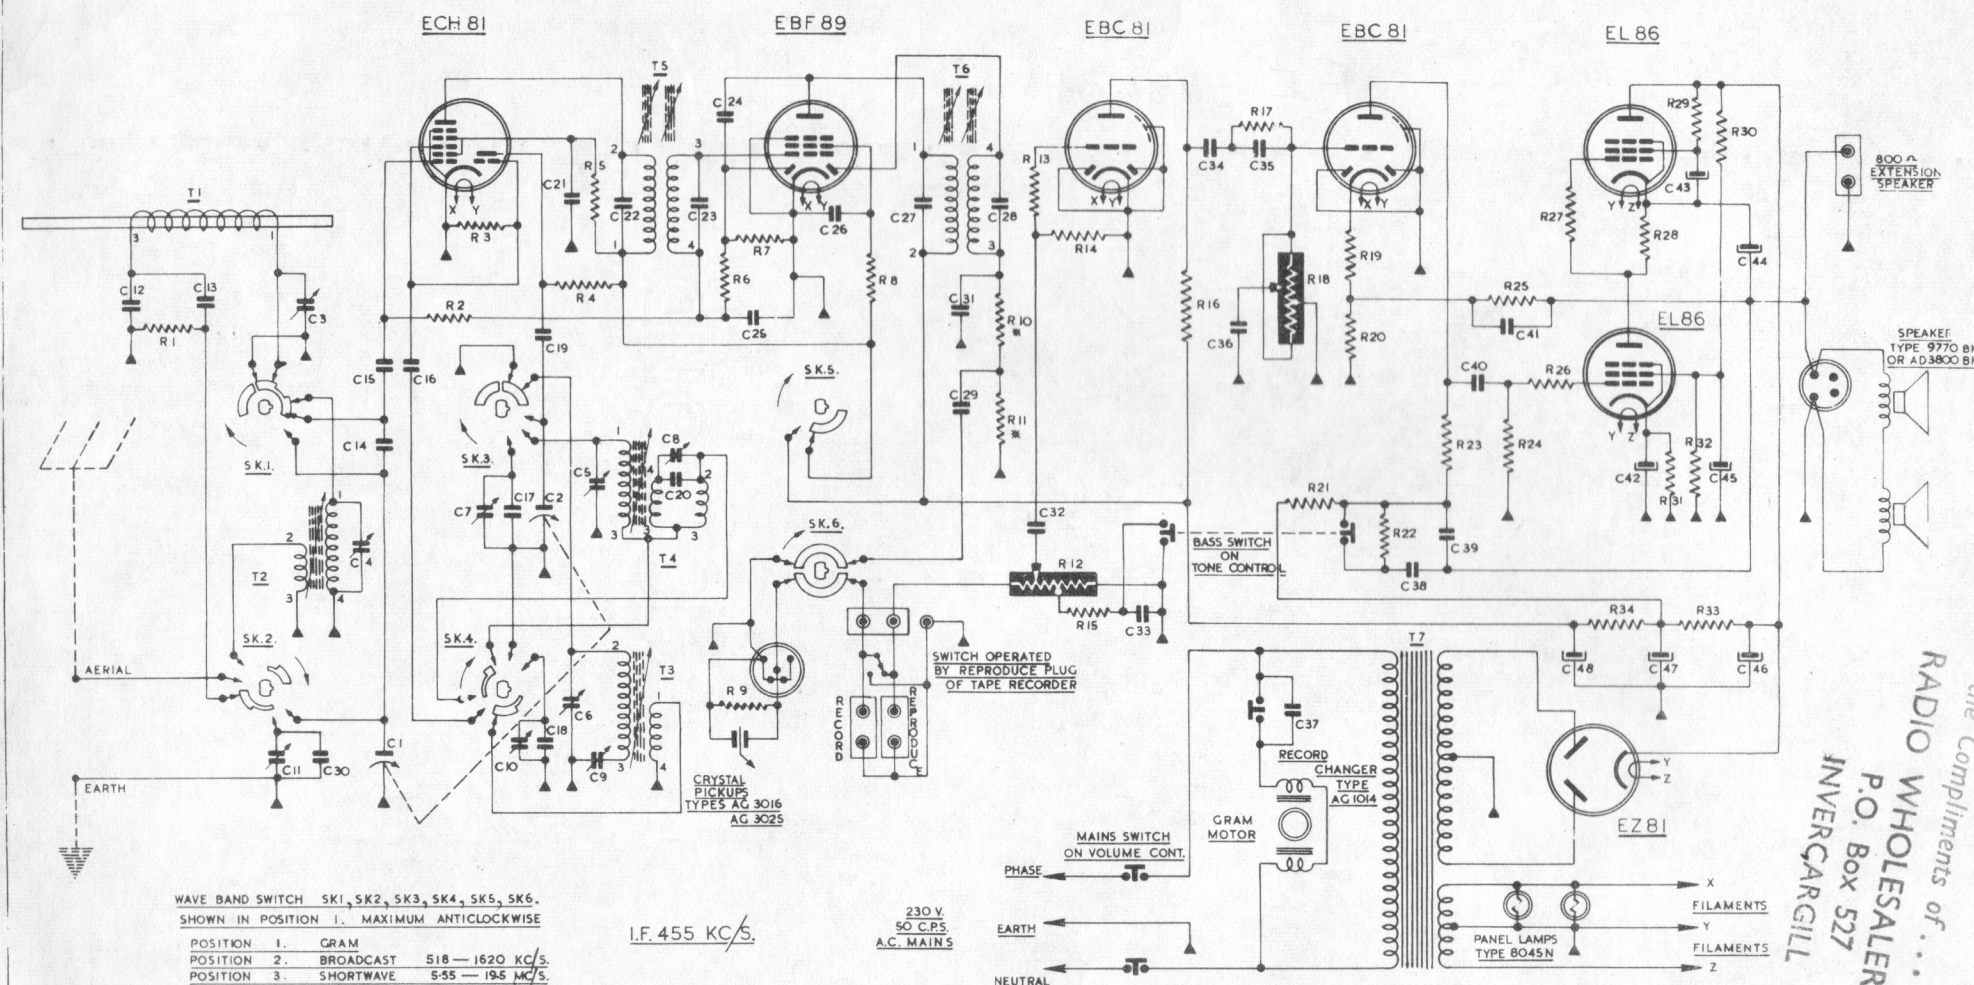


WAVE BAND SWITCH SK 1, SK 2, SK 3, SK 4, SK 5, SK 6.
SHOWN IN POSITION 1. MAXIMUM ANTICLOCKWISE

POSITION	1.	GRAM
POSITION 2.	BROADCAST	518 — 1620 KC/S.
POSITION 3.	SHORTWAVE	5.55 — 19.5 MC/S.
POSITION 4.	BANDSPREAD	25 & 31 METRES

I.F. 455 KC/S.

230 V.
50 C.P.S.
A.C. MAINS

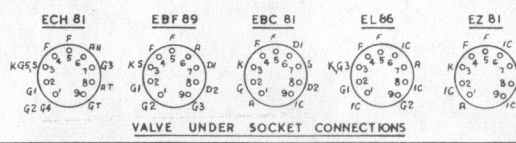

MODEL FZ 786 A

COIL CONNECTIONS				VALVE UNDER SOCKET CONNECTIONS				R11 330K 4 W.				MHA 6-58							
C1	9-488	MMFD	TUNING CONDENSER	C19	560	MMFD	CERAMIC	C37	0.01	MFD	750V. CERAMIC	R7	1M	1/4 W.	CARBON	R25	15K	3/4 W.	CARBON
C2	10-521	MMFD		C20	560	MMFD	CERAMIC	C38	0.1	MFD	400V. PAPER	R8	100K	1/4 W.	"	R26	1K	1/4 W.	"
C3	3-30	MMFD	AIR TRIMMER	C21	0.01	MFD	600V. PAPER	C39	0.01	MFD	600V. "	R9	220K	1/4 W.	"	R27	1K	1/4 W.	"
C4	3-30	MMFD		C22	110	MMFD	CERAMIC	C40	0.01	MFD	600V. "	R10	330K	1/4 W.	"	R28	150 ohms	1 W.	"
C5	3-30	MMFD	"	C23	110	MMFD	"	C41	500	MMFD	MICA	R11	100K	1/4 W.	"	R29	6K8	3/4 W.	"
C6	3-30	MMFD	"	C24	10	MMFD	"	C42	50	MFD	25V. ELECTROLYTIC	R12	M4 + 1M	CARBON POTENTIOMETER	R30	16K5	3/4 W.	"	
C7	3-30	MMFD	"	C25	0.05	MFD	100V. PAPER	C43	50	MFD	450V. "	R13	50K	1/4 W.	CARBON	R31	150 ohms	1 W.	"
C8	4-60	MMFD	"	C26	0.01	MFD	600V. "	C44	5	MFD	450V. "	R14	5M	1/2 W.	"	R32	47K	1 W.	"
C9	150-750	MMFD	PADDER	C27	110	MMFD	CERAMIC	C45	8	MFD	450V. "	R15	56K	1/4 W.	"	R33	1K8	5 W.	"
C10	4-60	MMFD		AIR TRIMMER	C28	110	MMFD	"	C46	40	MFD	350V. TRIPLE ELECTROLYTIC	R16	100K	1/4 W.	"	R34	1K8	4 W.
C11	4-60	MMFD	"	C29	0.01	MFD	400V. PAPER	C47	40	MFD	350V. TRIPLE ELECTROLYTIC	R17	470K	1/4 W.	"				
C12	3000	MMFD	STYROFLEX 125V. ±2%	C30	56	MMFD	CERAMIC	C48	20	MFD	"	R18	1M + 1M	CARBON POTENTIOMETER	T1	FERROXUBE RAD AERIAL COIL	VK 469-84		
C13	560	MMFD	CERAMIC	C31	47	MMFD	"	R1	10K	1/4 W.	CARBON	R19	1K	1/4 W.	CARBON	T2	SHORTWAVE AERIAL COIL	VK 469-87	
C14	233	MMFD	±1%	C32	0.01	MFD	400V. PAPER	R2	1M	1/4 W.	"	R20	300 ohms	1/4 W.	"	T3	BROADCAST DEC. COIL	VK 471-50	
C15	150	MMFD	"	C33	0.0022	MFD	600V. "	R3	47K	1/4 W.	"	R21	100K	1/2 W.	"	T4	SHORTWAVE DEC. COIL	VK 471-61	
C16	47	MMFD	"	C34	0.01	MFD	400V. "	R4	33K	1/4 W.	"	R22	4.7M	1/4 W.	"	T5	MICRO '12' I.F. BANDPASS FILTER	AS 187-42	
C17	180	MMFD	±1% SILVER MICA	C35	400	MMFD	MICA	R5	27K	1/4 W.	"	R23	100K	1/2 W.	"	T6	MICRO '12' I.F.	AS 187-42	
C18	200	MMFD	CERAMIC	C36	1500	MMFD	CERAMIC	R6	1M	1/4 W.	"	R24	470K	1/4 W.	"	T7	POWER TRANSFORMER	VK 631-10	

With the Compliments of...
RADIO WHOLESALE LTD.
P.O. Box 527
INVERCARGILL