



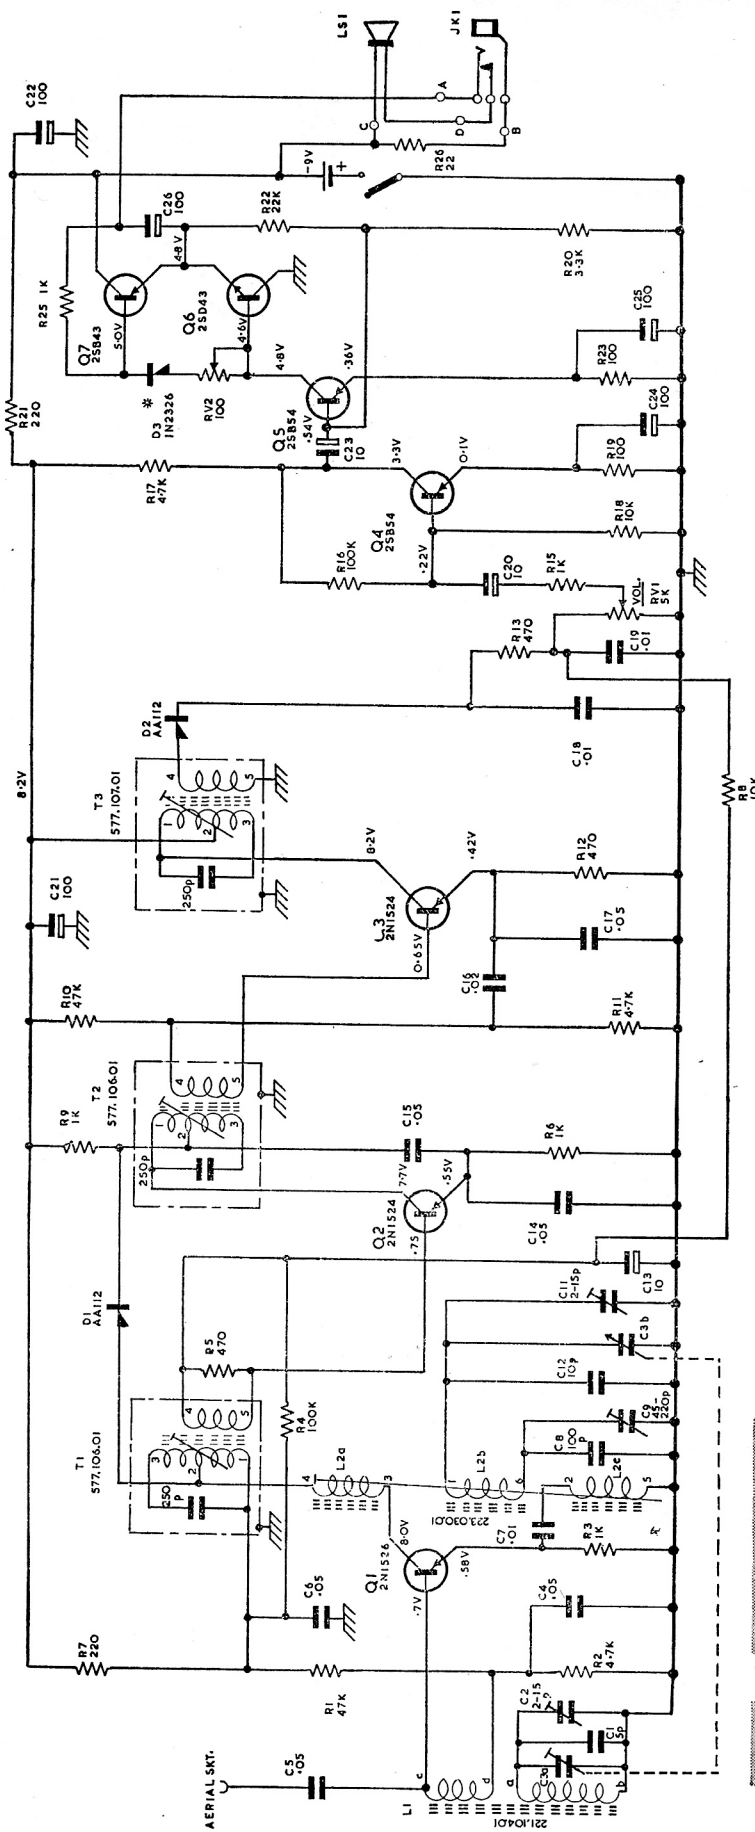


NOTES:—
RESISTOR VALUES SHOWN IN OHMS
CAPACITORS DENOTED BY P IN PICOFARADS
OTHER CAPACITORS SHOWN IN MICROFARADS
ON REPLACEMENT OF Q5,6 OR 7 ADJUST RV2 TO GIVE
Q6 & 7 A ZERO SIGNAL COLLECTOR CURRENT OF 3mA.

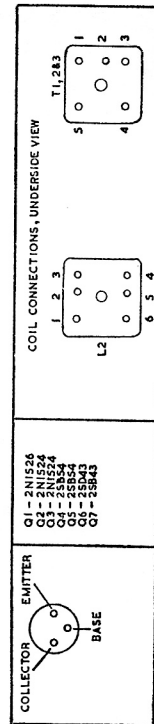

* D3. THERMAL COMPENSATING DIODE

260.250.01

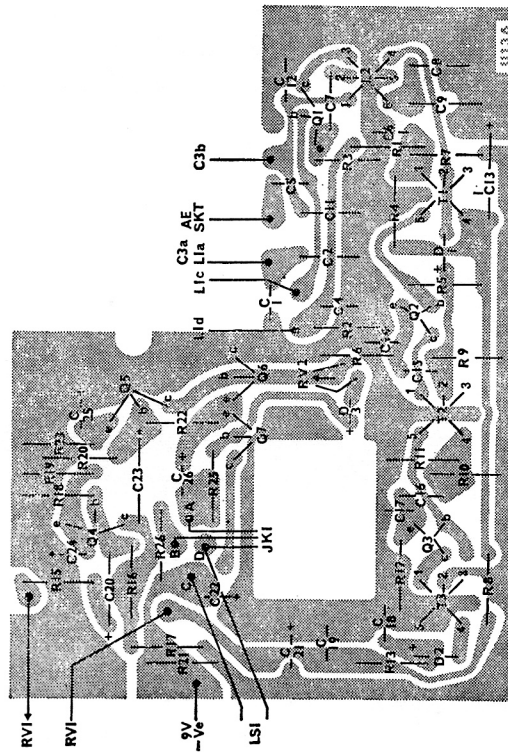

CIRCUIT DIAGRAM OF THE ULTIMATE AND EKCO ALL TRANSISTOR PORTABLE RADIO MODELS U/EI;36