

SERVICE BULLETIN

FOR

LA GLORIA

SIX TUBE RADIOGRAM

THE STANDARD MODEL IS A 6 TUBE SUPERHETERODYNE RECEIVER USED IN CONJUNCTION WITH A COLLARO RECORD CHANGER OF THE LATEST TYPE, AND IN ONE MODEL A COLLARO TAPE DECK IS INCORPORATED

SPECIFICATIONS

TUBES USED:

CONVERTER ECH81
I.F. AMPLIFIER EBF80
& DETECTOR
ST. A.F. AMPLIFIER 6AV6
2ND " " 6AV6
OUTPUT 6BV7
RECTIFIER EZ80

FREQUENCY COVERAGE

B.C. 535 K/CS TO 1620 K/CS


POWER SUPPLY

230 V 50 CYCLES A.C

POWER CONSUMPTION

50 WATTS


SEE SEPARATE LEAFLETS FOR SERVICE INFORMATION ON THE CHANGER AND TAPE DECK

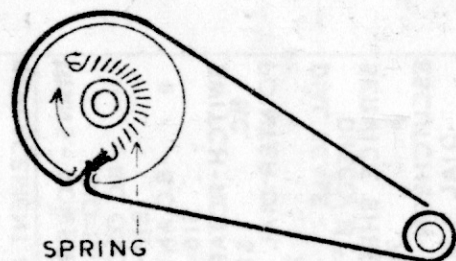

DIAL CORD INSTALLATION

- TUNING CONDENSER FULLY CLOSED
- POINTER AT LOW FREQ INDEX MARK ON DIAL SCALE
- CORD LENGTH 18 INCHES

1 1/2 TURNS
ON SPINDLE

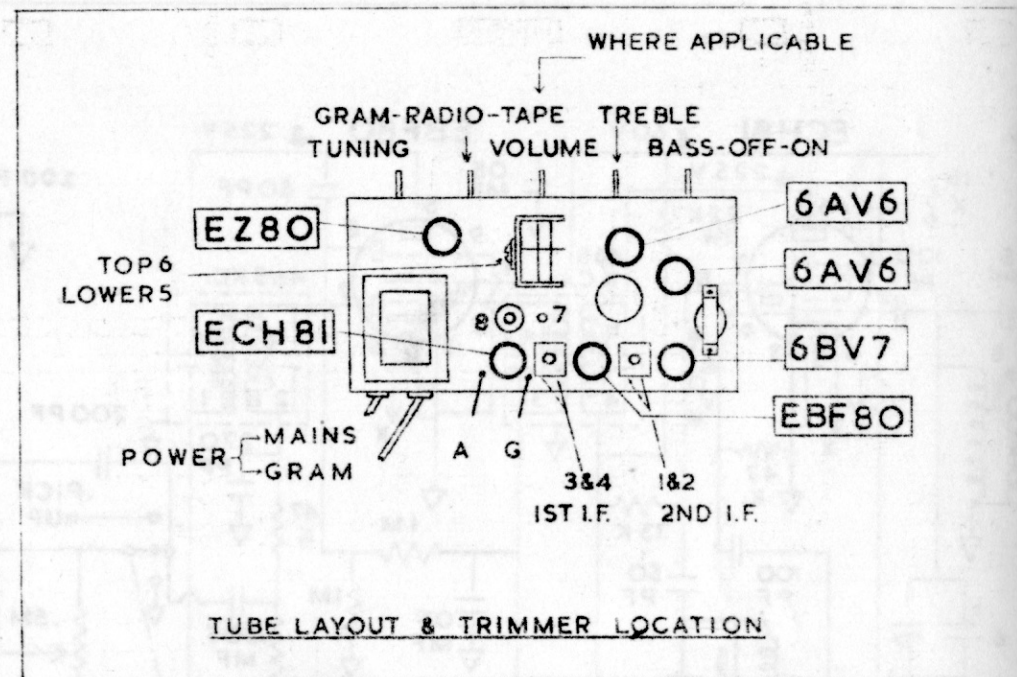

ALIGNMENT INSTRUCTIONS

GENERATOR FREQUENCY	GENERATOR CONNECTIONS	RECEIVER FREQUENCY	TRIMMERS	REMARKS
I. F. 465 K/CS	THROUGH .1MFD CONDENSER TO MIXER GRID	1600 K/CS	1, 2, 3, 4.	IN GIVEN ORDER ADJUST FOR MAXIMUM OUTPUT
B.C. 1400 K/CS	TO AERIAL LEAD THROUGH 200 MMFD OR DUMMY	1400 K/CS	5	SET FREQUENCY
"	"	"	6	ADJUST FOR MAXIMUM RESPONSE
B.C. 600 K/CS	"	600 K/CS	7	SET FREQUENCY
"	"	"	8	ADJUST FOR MAXIMUM SIGNAL
B.C. 1400 K/CS	"	1400 K/CS	5 & 6	CHECK FREQUENCY AND RESPONSE

