


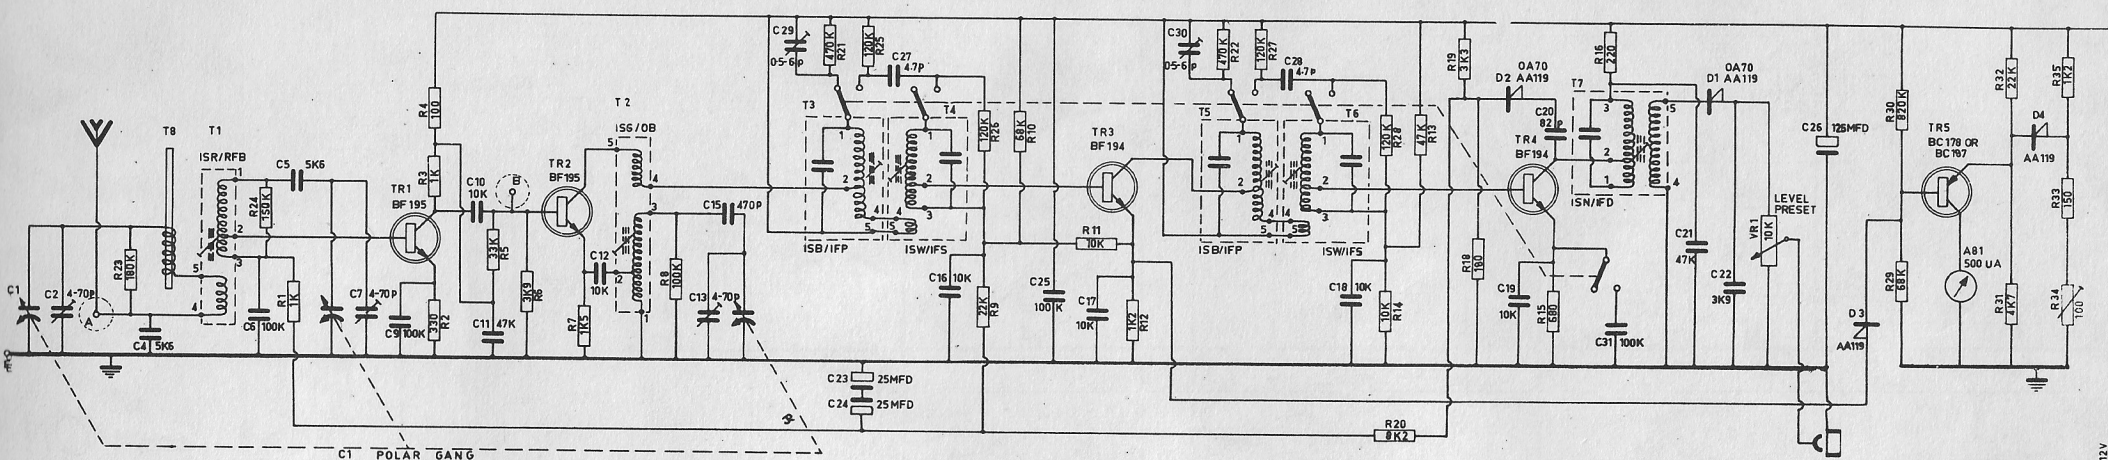
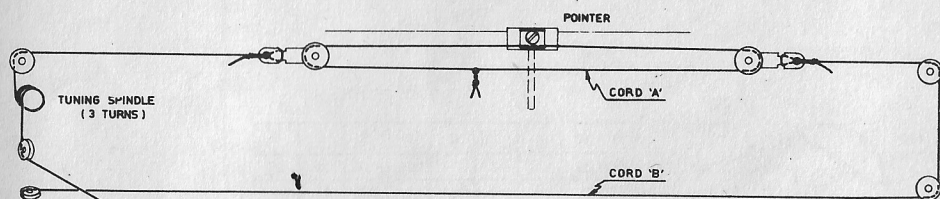


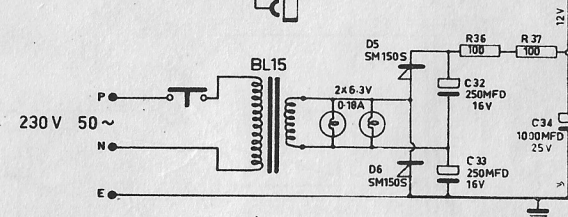


CIRCUIT DIAGRAM

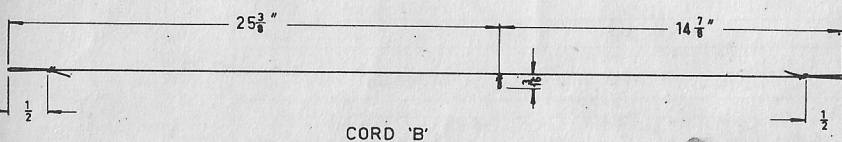

DIAL CORD STRINGING



TRANSISTOR	COLLECTOR	BASE	EMITTER
TR 1 BF 195	11	1	0-45
TR 2 BF 195	12	1-5	0-65
TR 3 BF 194	12	2-1	1-7
TR 4 BF 194	12	2	1-2
TR 5 BC 178/187	—	1-4	2




ALL VOLTAGES MEASURED WITH A 40 000 OHMS/VOLT METER UNDER NO SIGNAL CONDITIONS.

QUIESCENT CURRENT: APPROX. 20MA

I.F. CENTER FREQUENCY 455 KHZ

FREQUENCY COVERAGE 535 TO 1620 KHZ



SET R34 SO THAT TUNING INDICATOR SHOWS FULL SCALE DEFLECTION WITH 1V RF INTO TEST POINT 'A'. ADJUST WHERE REQUIRED TO HANDLE STRONGER SIGNALS.

LET.	REVISION	DATE	NAME
DATE: 7-10-68.	DRAWN BY: <i>R. Thompson</i>	CHECKED BY: <i>CM</i>	
BELL RADIO-TELEVISION CORP. LTD.			
SERVICE DATA FOR 5TWB69		DRWG. NO. 519-001	

THIS CHASSIS IS USED ON: "HI-FI" BROADCAST TUNER