


PHILIPS RADIOPLAYER MODEL 157/158 and M158

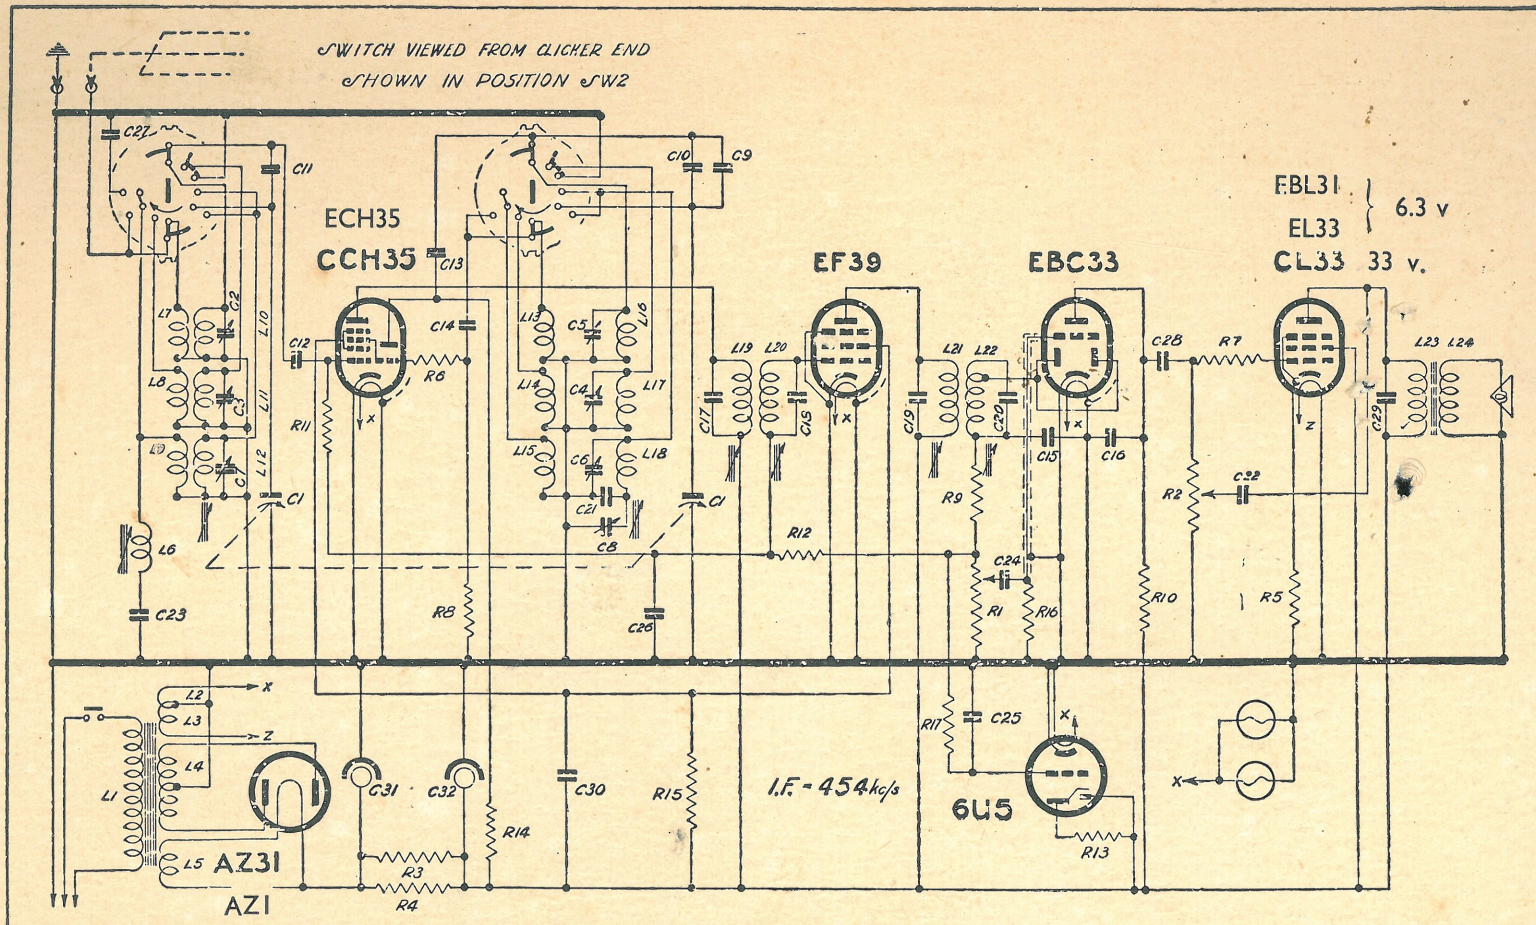

RESISTORS

			Code No.
R1	V.C. Pot. with Switch—	.35 Meg. . . .	49 500 13
R2	T.C. Pot.—	.5 Meg.	49 470 30
R3	Wire Wound Resistors—	1,500 Ohm.	49 356 29
R4	"	1,500 Ohm.	49 356 29
R5	Carbon Resistors—	150 Ohm. $\frac{1}{4}$ W.	49 377 14
R6	"	220 Ohm. $\frac{1}{4}$ W.	49 375 16
R7	"	1,000 Ohm. $\frac{1}{4}$ W.	49 375 24
R8	"	47,000 Ohm. $\frac{1}{4}$ W.	49 375 44
R9	"	56,000 Ohm. $\frac{1}{4}$ W.	49 375 45
R10	"	100,000 Ohm. $\frac{1}{4}$ W.	49 375 48
R11	"	1 Meg. $\frac{1}{2}$ W.	49 376 60
R12	"	1.8 Meg. $\frac{1}{4}$ W.	39 377 63
R13	"	(in eye socket) 1 Meg. (158/652 only)	
R14	"	22,000 Ohm. $\frac{1}{4}$ W.	49 377 40
R15	"	22,000 Ohm. $\frac{1}{4}$ W.	49 377 40
R16	"	2.7 Meg. $\frac{1}{4}$ W.	49 377 65
R17	"	2 Meg. $\frac{1}{2}$ W.	62/222
		(158/652 only)	

CONDENSERS

	Code No.		Code No.
C1 Tuning Gang	MK 210 17	C17 Mica Conds.—100 Ufd. in I.F. Trans. Can.	28 194 41
C2 Air Trimmer—20 Ufd.	MK 210 31	C18 " " 106 " " "	28 194 42
C3 " " 20 Ufd.	MK 210 31	C19 " " 106 " " "	28 194 43
C4 " " 20 Ufd.	MK 210 31	C20 " " 113 " " "	28 194 45
C5 " " 30 Ufd.	MK 210 22	C21 " " 400 " " "	49 057 00
C6 " " 30 Ufd.	MK 210 22	C22 " " 1,450 " " "	49 082 19
C7 Ceramic Trimmer	VK 230 11	C23 Moulded Mica Conds.—50 Ufd.	VK 230 17
C8 Wire Trimmer—125 Ufd.	28 212 07	C24 Moulded Conds.—10,000 Ufd. 100 V.	49 127 57
C9 Porcelain Conds.—56 Ufd.	49 055 25	C25 " " 47,000 Ufd. 100 V. (158/652 only)	49 128 22
C10 " " 100 Ufd. 10%	49 055 28	C26 " " 56,000 Ufd. 200 V.	49 128 23
C11 " " 100 Ufd. 10%	49 055 28	C27 " " 2,200 Ufd. 400 V.	49 128 53
C12 " " 100 Ufd. 10%	49 055 28	C28 " " 10,000 Ufd. 400 V.	49 128 14
C13 " " 100 Ufd. 10%	49 055 28	C29 " " 22,000 Ufd. 600 V.	49 129 30
C14 " " 100 Ufd. 10%	49 055 28	C30 " " 220,000 Ufd. 400 V.	49 128 30
C15 " " 100 Ufd. 20%	49 055 49	C31 Elec. Conds.—32 Ufd. 320 V.	28 182 40
C16 " " 100 Ufd. 20%	49 055 49	C32 " " 32 Ufd. 320 V.	28 182 40