


Interim Circuit

PHILIPS Grand Classique

Model FZ676A

- C1 12-500 mmfd } ganged
C2 12-500 mmfd } condenser
C3 3-30 mmfd air trimmer
C4 3-30 mmfd air trimmer
C5 3-30 mmfd air trimmer
C6 3-30 mmfd air trimmer
C7 3-30 mmfd air trimmer
C8 4-60 mmfd air trimmer
C9 150-750 mmfd padder
C10 175 mmfd wire trimmer
C11 175 mmfd wire trimmer
C12 3300 mmfd Styroflex 125v
C13 560 mmfd ceramic
C14 233 mmfd +/- 1% ceramic
C15 150 mmfd ceramic
C16 47 mmfd ceramic
C17 190 mmfd +/- 1% mica
C18 120 mmfd ceramic
C19 560 mmfd ceramic
C20 82 mmfd ceramic
C21 0.01 mfd 600v paper
C22 110 mmfd ceramic
C23 110 mmfd ceramic
C24 10 mmfd ceramic
C25 0.05 mfd 100v paper
C26 0.01 mfd 600v paper
C27 110 mmfd ceramic
C28 195 mmfd ceramic
C29 0.01 mfd 500v paper
C30 0.01 mfd 400v paper
C31 47 mmfd ceramic
C32 0.01 mfd 600v paper
C33 0.01 mfd 600v paper
C34 0.1 mfd 350v paper
C35 0.01 mfd 600v paper
C36 0.01 mfd 600v paper
C37 0.01 mfd 600v paper
C38 0.01 mfd 750v ceramic
C39 5000 mmfd 400v paper
C40 0.01 mfd 600 v paper
C41 2000 mmfd 750v paper
C42 50 mfd 12.5v Bipolar elco.
C43 40 mfd 350v } elco.
C44 40 mfd 350v } triple
C45 20 mfd 350v }

- R1 10k 1/4w. carbon
R2 1M 1/4w. carbon
R3 47k 1/4w. carbon
R4 33k 1/4w. carbon
R5 27k 1/4w. carbon
R6 1M 1/4w. carbon
R7 1M 1/4w. carbon
R8 100k 1/4w. carbon
R9 470k 1/4w. carbon
R10 M4 + 1M6 carbon potentiometer
R11 56k 1/4w. carbon
R12 4.7M 1/4w. carbon

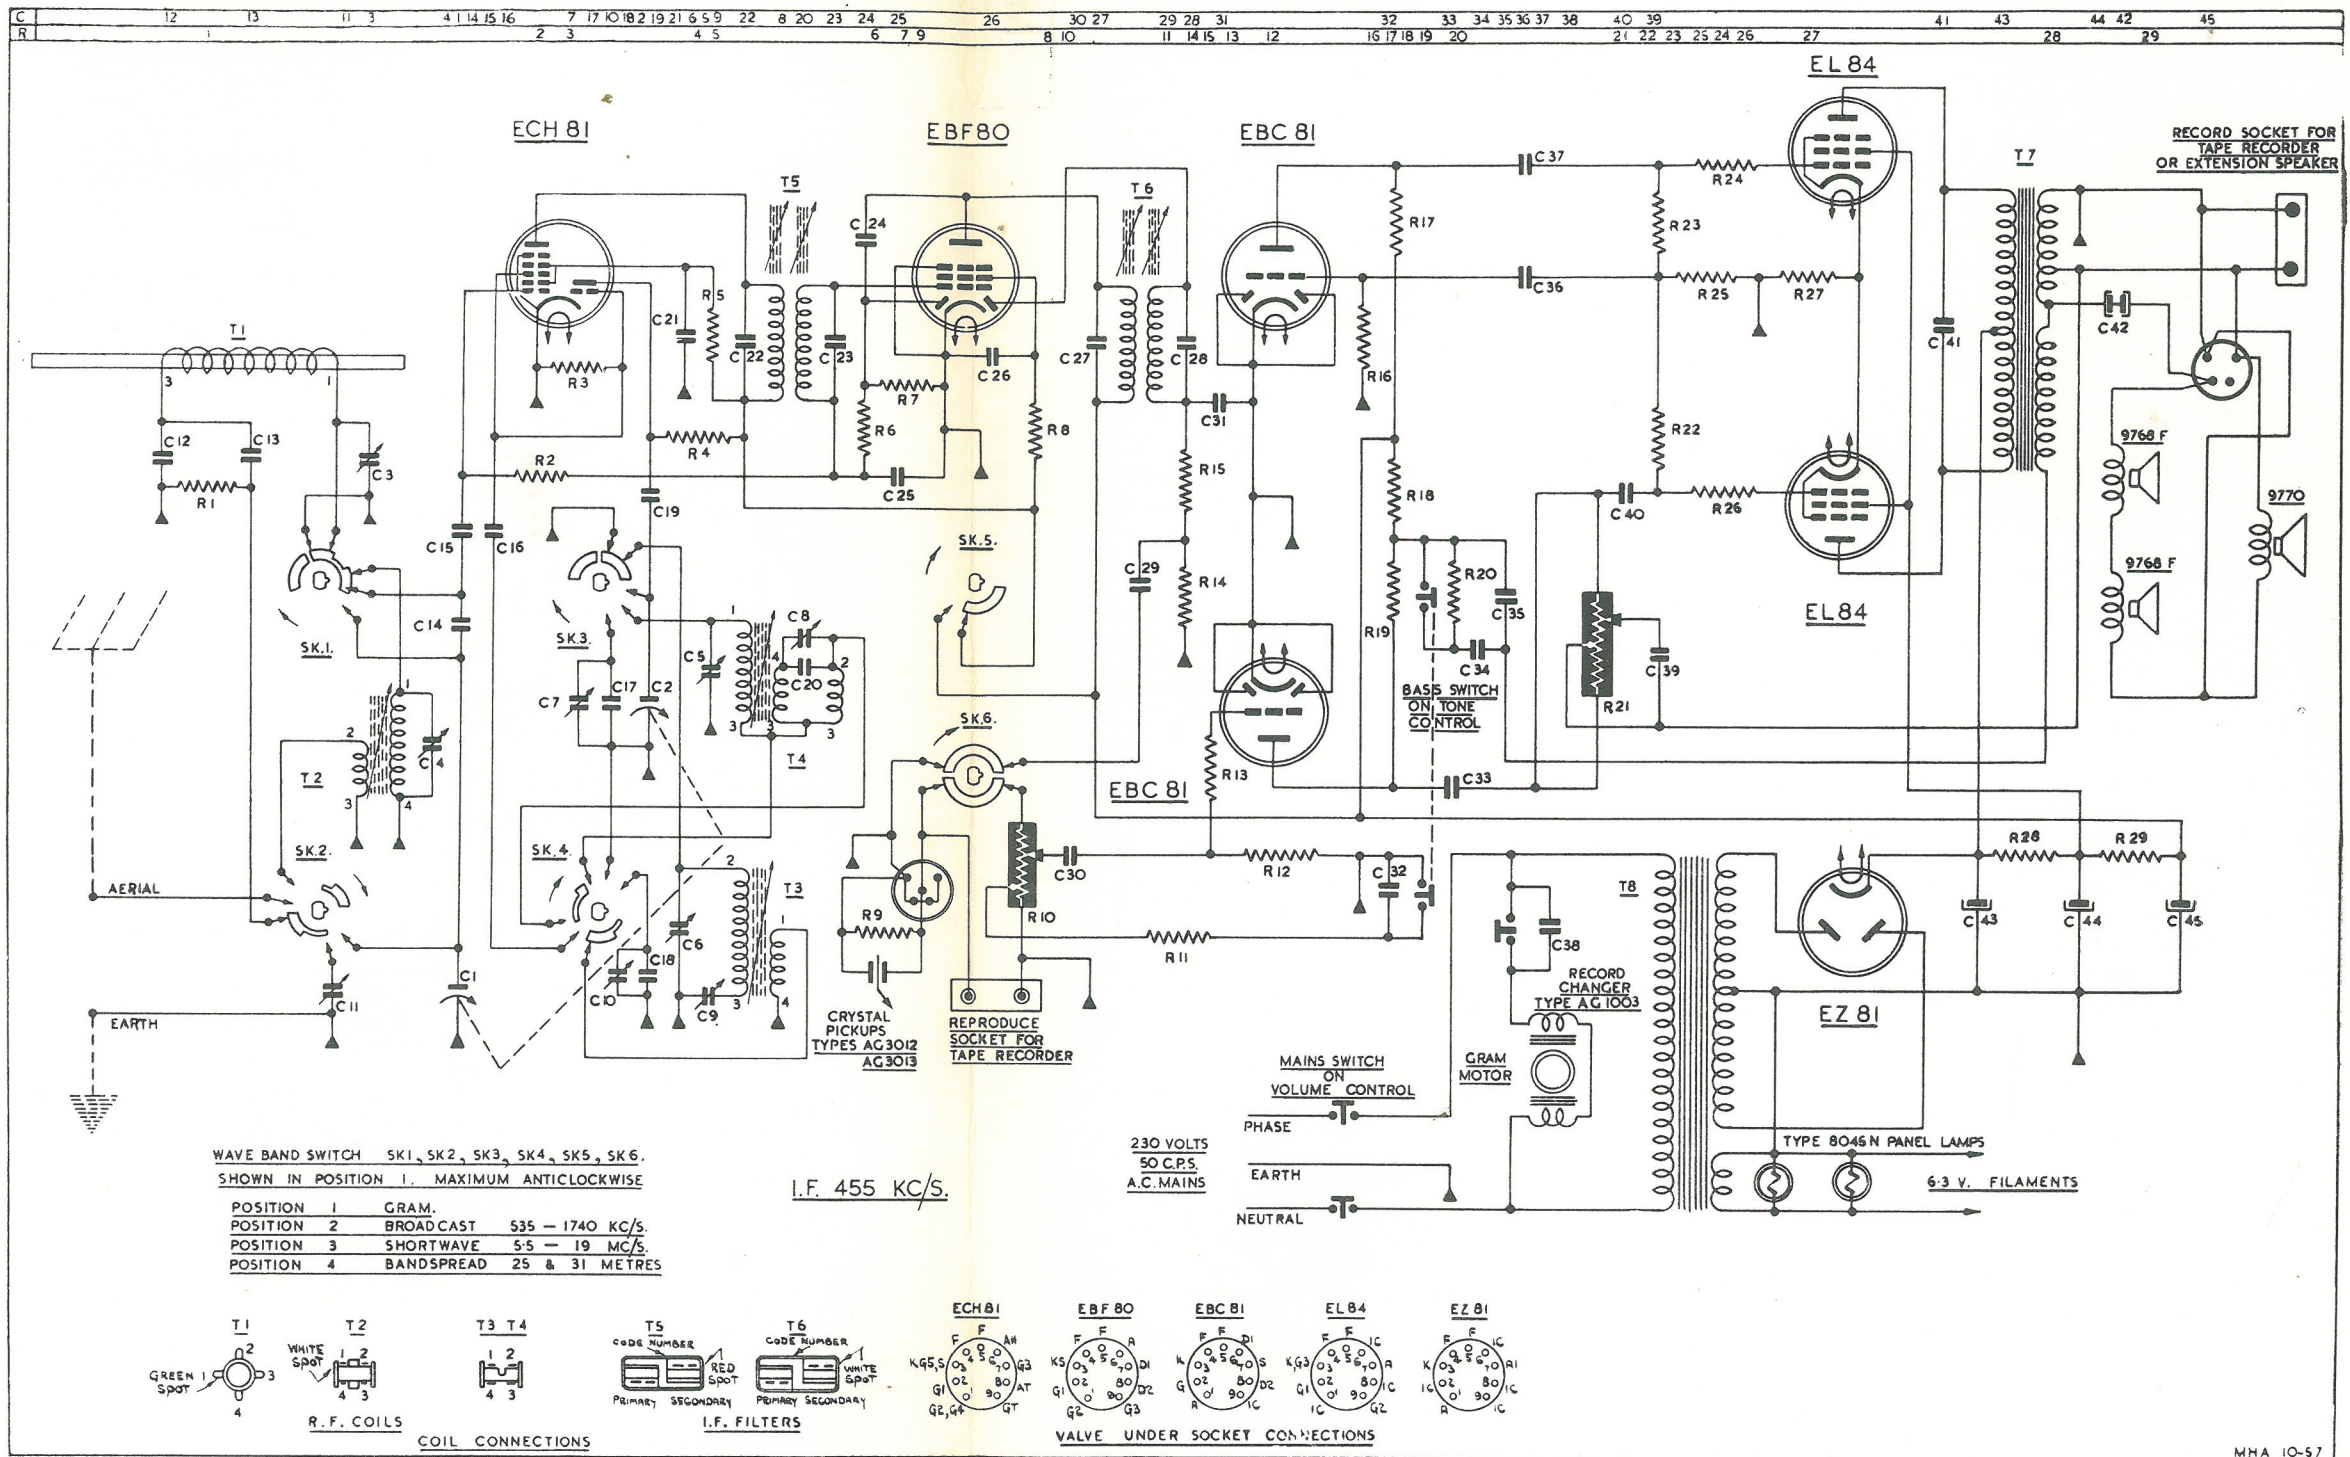

- R13 56k 1/4w. carbon
R14 330k 1/4w. carbon
R15 100k 1/4w. carbon
R16 4.7M 1/4w. carbon
R17 220k 1/4w. carbon
R18 100k 1/4w. carbon
R19 100k 1/4w. carbon
R20 4.7M 1/4w. carbon
R21 1M + 1M carbon potentiometer
R22 220k 1/4w. carbon
R23 220k 1/4w. carbon
R24 1000 ohms 1/4w. carbon
R25 220k 1/4w. carbon
R26 1000 ohms 1/4w. carbon
R27 82 ohms 1w. carbon
R28 1000 ohms 4w. wire wound
R29 1000 ohms 4w. wire wound
T1 Ferroxcube rod aerial coil VK 469 73
T2 SW aerial coil VK 469 80
T3 BC oscillator coil VK 471 50
T4 SW oscillator coil VK 471 37
T5 Micro '12' I.F. bandpass filter A3 127 42
T6 Micro '12' I.F. bandpass filter A3 126 84
T7 Output transformer VK 671 11
T8 Power transformer VK 631 07