


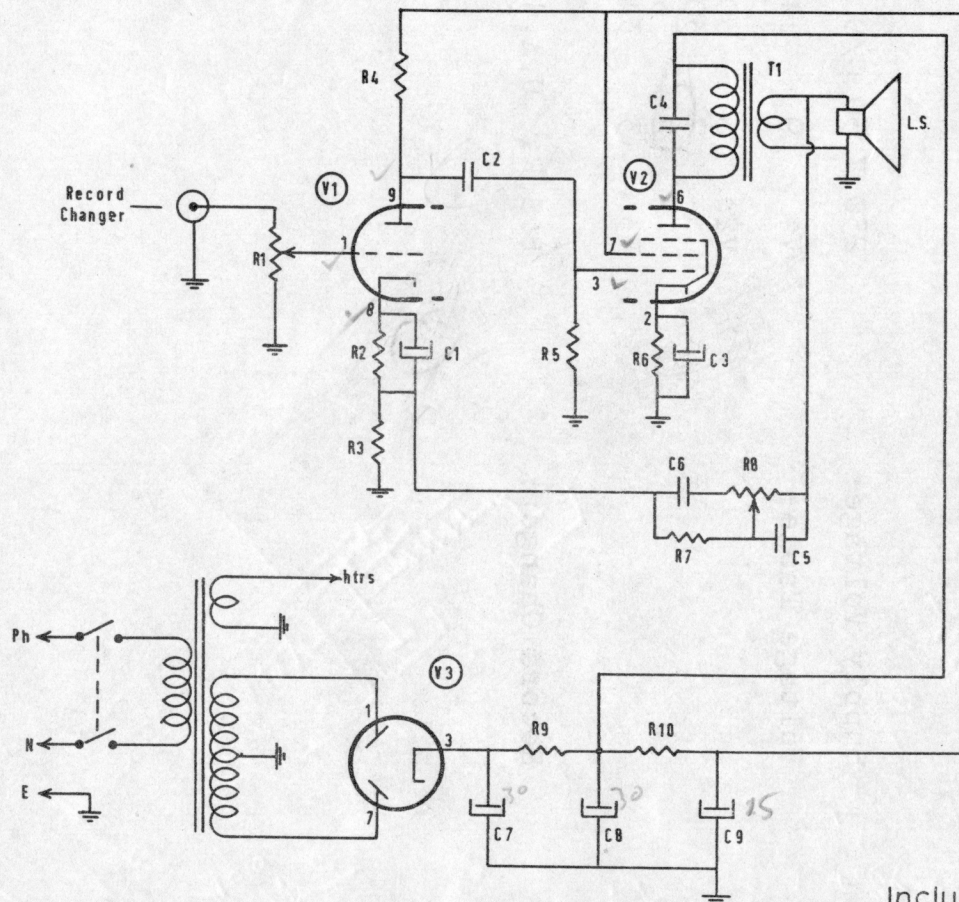

R1	500k	log vol. cont.
R2	1k	1/2w
R3	1k	"
R4	270k	"
R5	560K	"
R6	390ohm	1w
R7	1.5k	1/2 w
R8	10k	lin.+ switch
R9	1k	5 w
R10	2.2k	1 w
C1	25mf	25v electro.
C2	.05 mf	
C3	25mf	25v electro.
C4	4700 pf	
C5	.27mf	
C6	.05mf	
C7	40 mf	} 350v electro.
C8	40 mf	
C9	20mf	
V1	1/2	ECL82
V2	1/2	ECL82
V3		E280
T1	7k / 50ohm	
L.S.	Speaker	6 x 4 50ohm

Includes JEWEL BOX Model

STEWART ELECTRICAL INDUSTRIES LTD.
CHRISTCHURCH N.Z.

MANHATTAN Monaural
Record Player Model 3MD

DESIGN J.S.	CHECKED P.T.
DRAWN CB	

STEWART "MANHATTAN"

TECHNICAL INFORMATION:

Speaker: - Philips ADZ 3460 6" x 4"
Valves: - ECL82 Audio Amplifier and
output valve.
EZ80 Rectifier

Supply Voltage: 230 V 50 C/S

Voltage Table:	V1	9	140	Volts
		8	2	"
	V2	6	300	"
		7	300	"
		2	38	"
	V3	3	340	"

Record Changer: B.S.R. U.A.14