


PHILIPS MODEL 595

Mullard 747

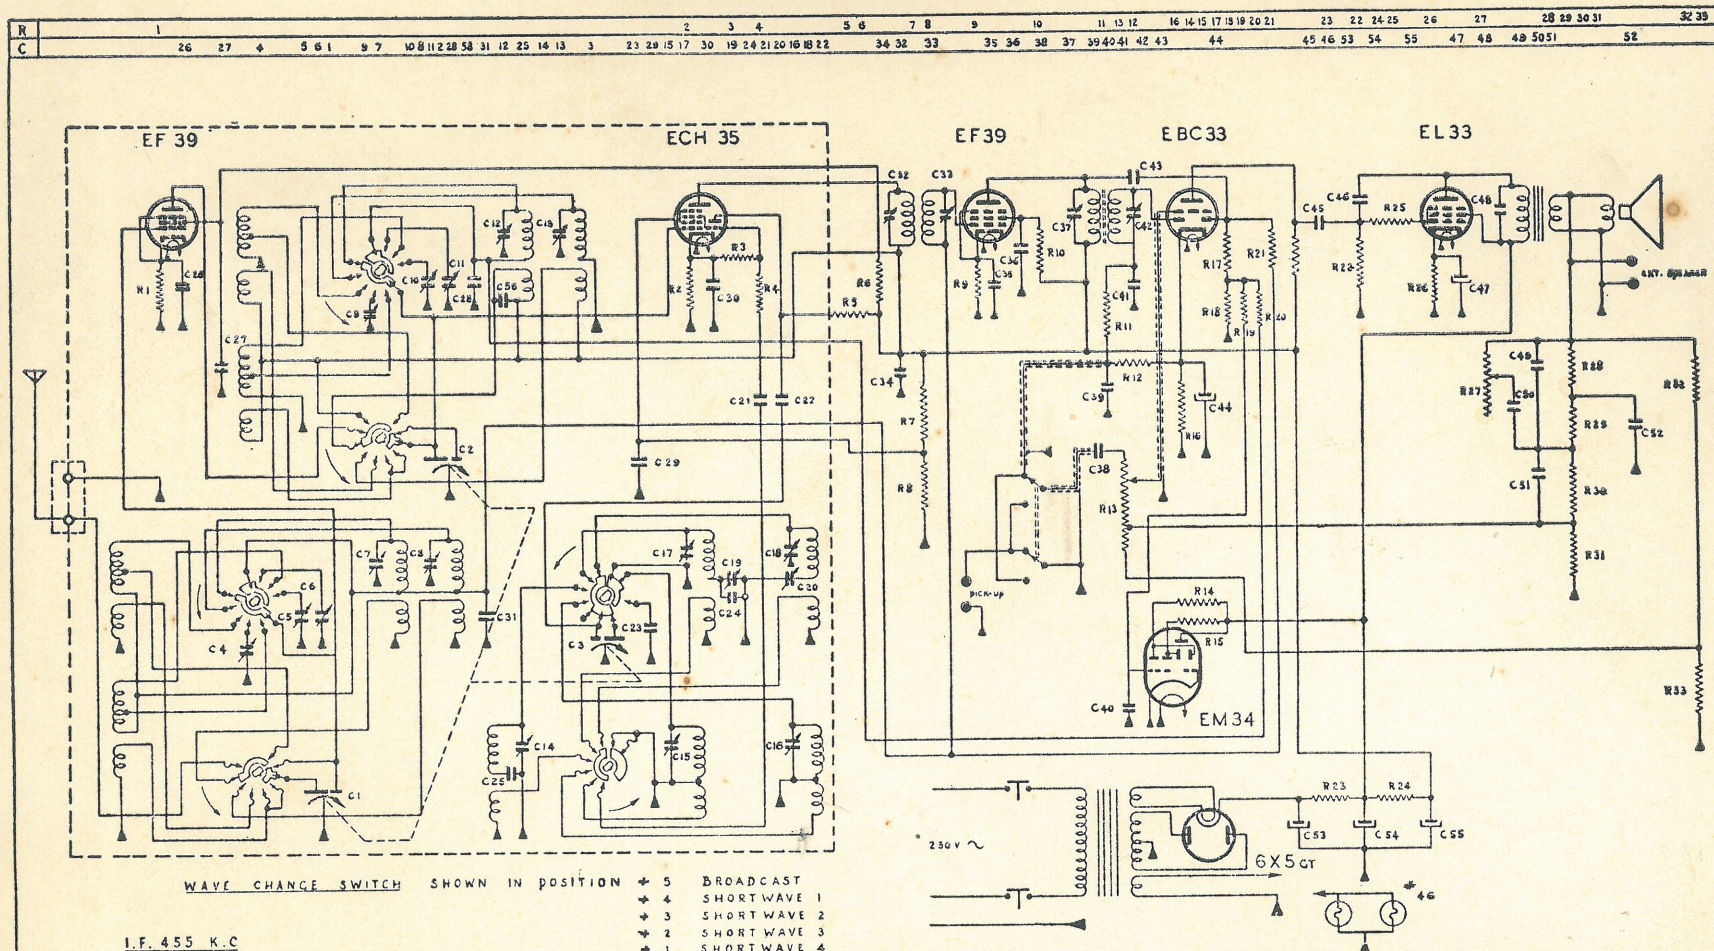

C1 3 gang split stator
C2 tuning cond.
C3 3-20 mmfd. } triple
C4 3-20 mmfd. } trim
C5 3-20 mmfd. } bank
C6 5-40 mmfd. }
C7 3-30 mmfd. air trim.
C8 3-30 mmfd. air trim.
C9 3-20 mmfd. } triple
C10 3-20 mmfd. } trim
C11 5-40 mmfd. } bank
C12 3-30 mmfd. air trim.
C13 3-30 mmfd. air trim.
C14 25-150 mmfd. trim.

C15 13-110 mmfd. trim.
C16 10-30 mmfd. trim.
C17 3-30 mmfd. air trim.
C18 3-30 mmfd. air trim.
C19 450-600 mmfd. padder
C20 450-600 mmfd. padder
C21 100 mmfd. mica
C22 100 mmfd. mica
C23 50 mmfd. negative temp. coeff.
C24 .001 mfd. mica
C25 .0065 mfd. mica
C26 .05 mfd. 400v. paper
C27 .05 mfd. 400v. paper
C28 .05 mfd. 400v. paper


C29 .05 mfd. 400v. paper
C30 .05 mfd. 400v. paper
C31 .05 mfd. 400v. paper
C32 I.F. trimmer
C33 I.F. trimmer
C34 .25 mfd. 400v. paper
C35 .05 mfd. 400v. paper
C36 .01 mfd. 400v. paper
C37 I.F. trimmer
C38 .01 mfd. 400v. paper
C39 100 mmfd. mica
C40 .05 mfd. 400v. paper
C41 100 mmfd. mica
C42 I.F. trimmer
C43 10 mmfd. ceramic
C44 25 mfd. 25v. electro.

C45 .01 mfd. 400v. paper
C46 100 mmfd. mica
C47 25 mfd. 25v. electro.
C48 .0022 mfd. 400v. paper
C49 600 mmfd. mica
C50 .02 mfd. 400v. paper
C51 .02 mfd. 400v. paper
C52 .01 mfd. 400 v. paper
C53 40 mfd. } triple
C54 40 mfd. } electro-
C55 20 mfd. } lytic
C56 100 mmfd. mica
R1 200 ohms 1/2 watt
R2 200 ohms 1/2 watt


R3 50,000 ohms 1/2 watt
R4 200 ohms 1/2 watt
R5 25,000 ohms 1/2 watt
R6 100,000 ohms 1/2 watt
R7 25,000 ohms 1/2 watt
R8 50,000 ohms 1/2 watt
R9 330 ohms 1/2 watt
R10 100,000 ohms 1/2 watt
R11 47,000 ohms 1/2 watt
R12 1 meg 1/2 watt
R13 2 meg vol. control tapped .6 meg
R14 1 meg 1/2 watt
R15 1 meg 1/2 watt
R16 2,200 ohms 1/2 watt
R17 470,000 ohms 1/2 watt

R18 1 meg 1/2 watt
R19 .5 meg 1/2 watt
R20 2 meg 1/2 watt
R21 2 meg. 1/2 watt
R22 470,000 ohms 1/2 watt
R23 900 ohms 6 watts
R24 2,200 ohms 3 watts
R25 47,000 ohms 1/2 watt
R26 150 ohms 1 watt
R27 .5 meg tone control
R28 7,500 ohms 1/2 watt
R29 47,000 ohms 1/2 watt
R30 220,000 ohms 1/2 watt
R31 20,000 ohms 1/2 watt
R32 100 ohms 1/2 watt
R33 30 ohms 1/2 watt
R34 100,000 ohms 1/2 watt

TRIMMER POSITIONS PHILIPS RADIOPLAYER MODELS 547, 595, 597, 601

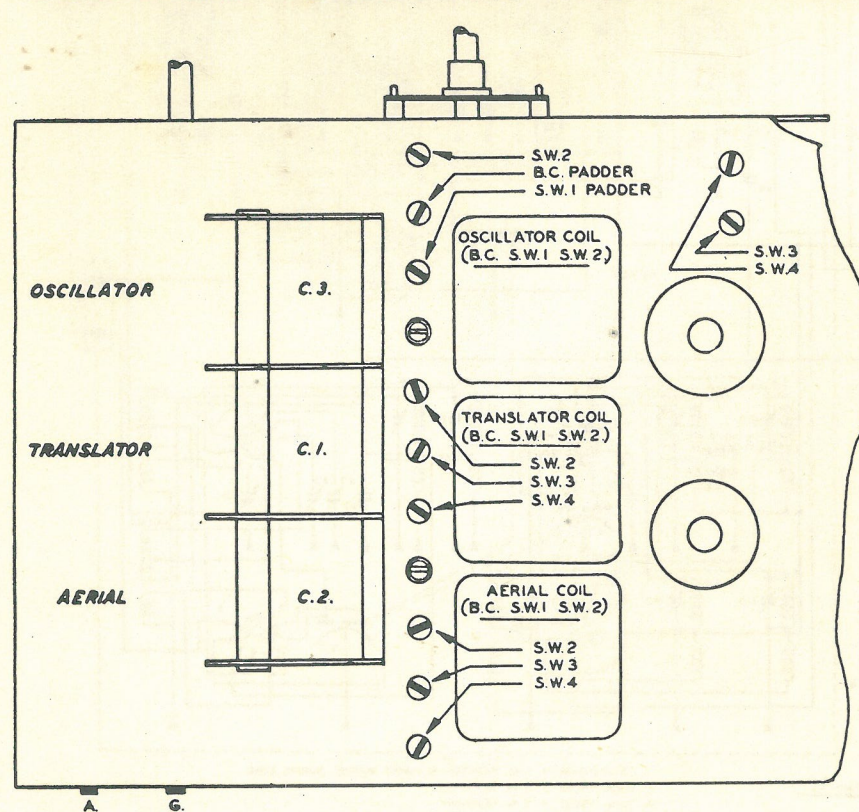

TOP VIEW

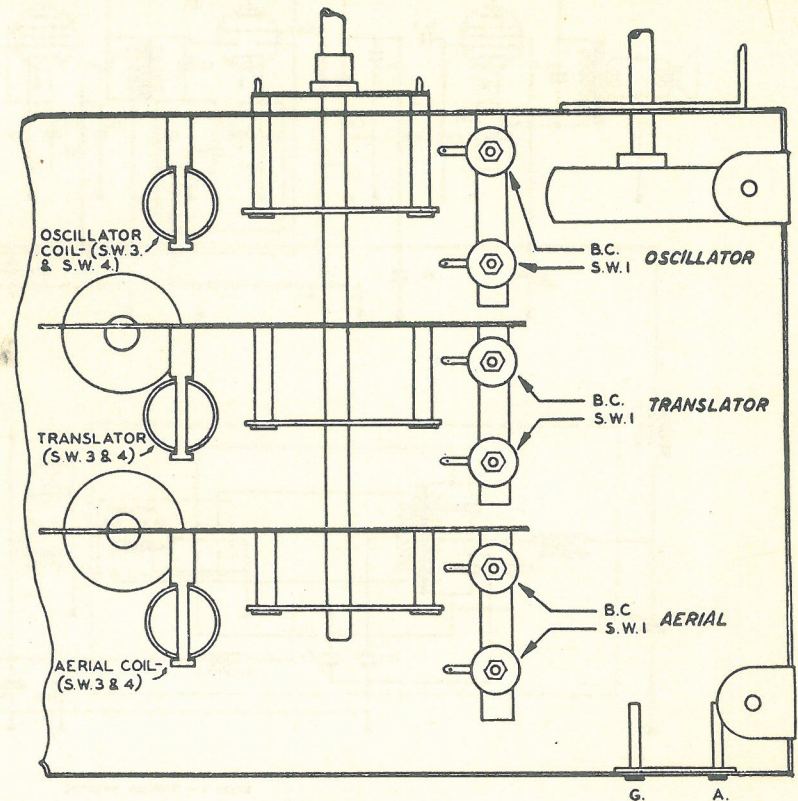

UNDERNEATH VIEW

TRIMMER POSITIONS — MODELS 547, 595,
597, 601.