◄ BELL ►

7 TRANSISTORS. MODEL 7T9

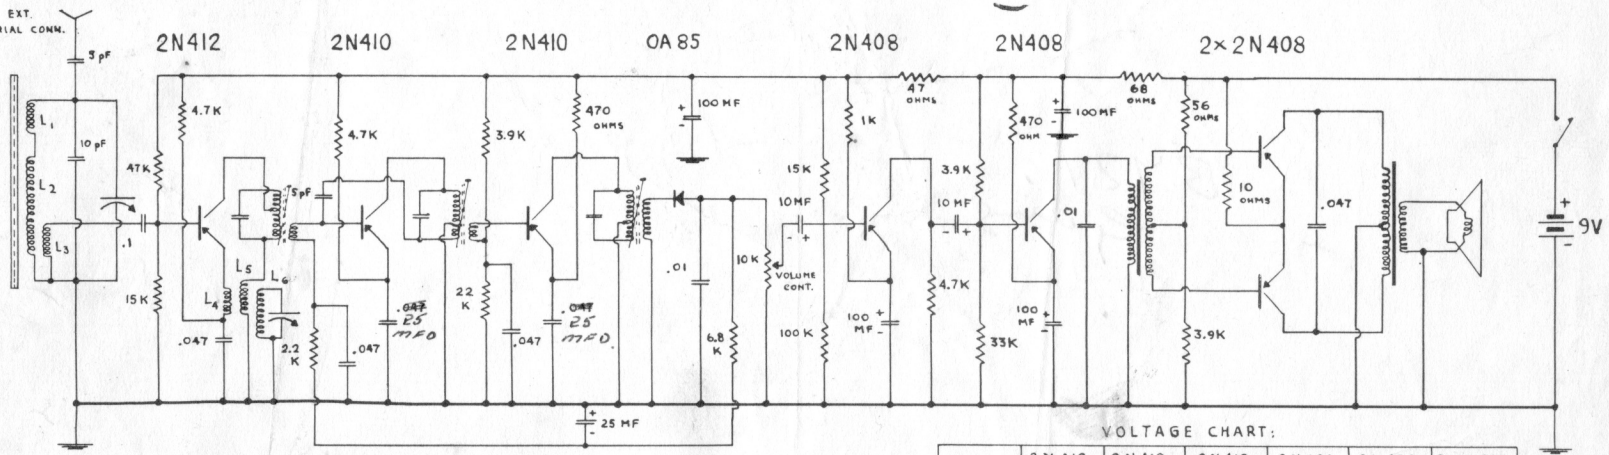

IF = 455 KC/S

COIL DATA:

AERIAL		OSCILLATOR	
L_1	20 TURNS	L_4	4 TURNS
L_2	75 -"-	L_5	10 -"-
L_3	7 -"-	L_6	110 -"-

ATTENTION:
BATTERY NEGATIVE
CONNECTED TO CHASSIS

STANDING CURRENT 11MA.

VOLTAGE CHART:

	2N412 MIXER	2N410 1. IF. AMP	2N410 2. IF. AMP	2N408 AUDIO	2N408 DRIVER	2×2N408 OUTPUT
BASE	+2.1	+0.3	+6.3	+6.8	+7.3	+8.8
EMITTER	+2.2	+0.5	+6.5	+7.0	+7.5	+8.9
COLLECTOR	+.05	–	–	+4.0	+0.3	–

ALL READINGS ARE TAKEN WITH VTVM (WITH NO SIGNAL AND NO VOLUME) TO CHASSIS

DESIGN: B. JUERGENS.

BELL RADIO-TELEVISION CORPN LTD

gang cap