

TECHNICAL INFORMATION

COVERING

BROADCAST RECEIVER TYPE 519 A.B.

COLLIER & BEALE Ltd., WELLINGTON

Just 1950

TYPE SET—A.C.-Battery Superhetrodyne Portable—self contained Loop Antenna.
TUBES (Five)—1T4 R.F. Amp., 1R5 Converter, 1T4 I.F. Amp., 1S5 Det.-A.F., 3V4 Power Output.
POWER SUPPLY—230 v. A.C., or self-contained 9 v. and 90 v. Batteries.
CONSUMPTION—A.C.—15 watts, Battery—"A," 50 m.a.; "B," 12.5 m.a.
TUNING RANGE—Broadcast, 535-1540 k.c.

ALIGNMENT INSTRUCTIONS

To set pointer, fully mesh variable condenser and set pointer at last reference mark at left end of dial. Set volume control at maximum and keep output from signal generator no higher than necessary to obtain output readings.



Dummy Antenna	Signal Generator Coupling	Sig. Gen. Frequency	Band Switch Position	Radio Dial Setting	Output Meter	Adjust	Remarks
0.1 μ fd.	High Side to pin No. 6 of 1R5	455 Kc.		High freq. end	Across voice coil	A1, A2, A3, A4.	Adjust for maximum output
R.M.A. Standard	High side to ant. Terminal	1400 Kc.		1400 Kc.	"	C22	" "
"	"	1400 Kc.		1400 Kc.	"	C20 & C21	" "
"	"	600 Kc.		Rock Variable	"	C15	" "

CAPACITORS			MISCELLANEOUS			RESISTORS		
Ref. No.	Cap.	Volts	Ref. No.	Res., Pri.	Res., Sec.	Ref. No.	Res.	Watts
C1	250 μ fd.	15	789	0.72 ohm	1.68 ohm	R1	10 meg.	$\frac{1}{2}$
C2-3	50 + 50 μ fd.	150	489	64 ohm	2.7 ohm	R2	5 meg.	$\frac{1}{2}$
C4	0.1 μ fd.	350	189	0.82 ohm	2.7 ohm	R3	5 meg.	$\frac{1}{2}$
C5	0.1 μ fd.	350	519AB-1	7 ohm	7 ohm	R4	3 meg.	$\frac{1}{2}$
C6	0.1 μ fd.	350	519AB-2	7 ohm	7 ohm	R5	1 meg.	$\frac{1}{2}$
C7	0.1 μ fd.	350	L1	0.7 ohm		R6	1 meg.	$\frac{1}{2}$
C8	0.1 μ fd.	350	952	1.64 ohm		R7	1 meg.	$\frac{1}{2}$
C9	0.05 μ fd.	350		volts	volts	R8	500K ohm	Pot.
C10	0.05 μ fd.	350	TR5568-1	230	110	R9	250K ohm	$\frac{1}{2}$
C11	0.01 μ fd.	350		Type	Transformer	R11	100K ohm	$\frac{1}{2}$
C12	0.01 μ fd.	350	SP1	5in. P.M.	10,000 ohm	R12	50K ohm	$\frac{1}{2}$
C13	0.01 μ fd.	350				R13	10K ohm	$\frac{1}{2}$
C14	0.002 μ fd.	Mica	SW1	D.P.D.T.		R14	2K ohm	$\frac{1}{2}$
C15	600 μ fd.	Padder	SW2	3 P.S.T. switch attached to R8		R15	1K ohm	$\frac{1}{2}$
C16-18	100 μ fd.	Mica	"A" Batt.	9v. E.R. No. 739		R16	1K ohm	$\frac{1}{2}$
C19	50 μ fd.	Mica	"B" Batt.	2x 45v. E.R. No. 482.		R17	500 ohm	$\frac{1}{2}$
C20-22	3-30 μ fd.	Trimmer	PL	6.3v. 0.3A Tub. M.E.S.		R18-19	400 ohm	$\frac{1}{2}$
C23-24	5 μ fd.	Ceramic	CV	Polar C90-03/1 (swing 351mmf.)		R20	330 ohm	$\frac{1}{2}$

Rectifier RE 3612-1 (Federal) selenium 5A.

DIAL STRINGING ARRANGEMENT

TOTAL CORD LENGTH 2'-10 $\frac{1}{2}$ "

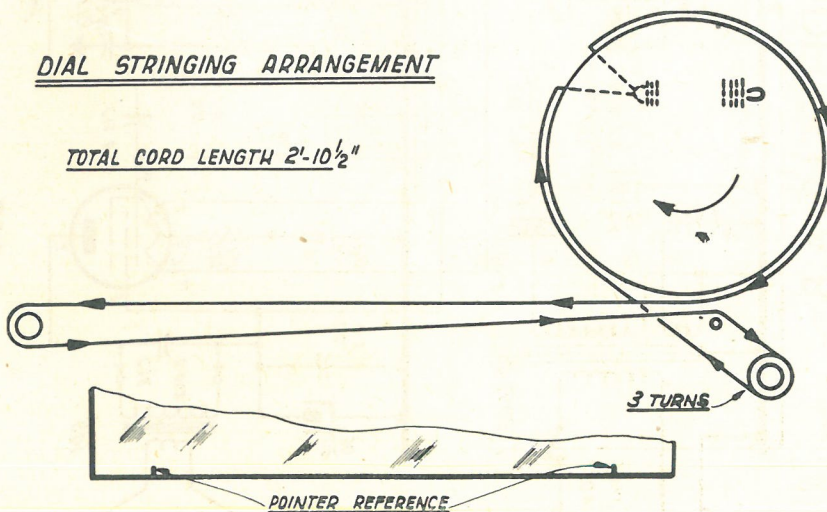


NOTE: PLUGS VIEWED FROM PIN SIDE

BATTERY PLUG WIRING CONNECTIONS

This model has a dial like when used on AC was a direct current Rept 1949

dwg 500/6/50/112

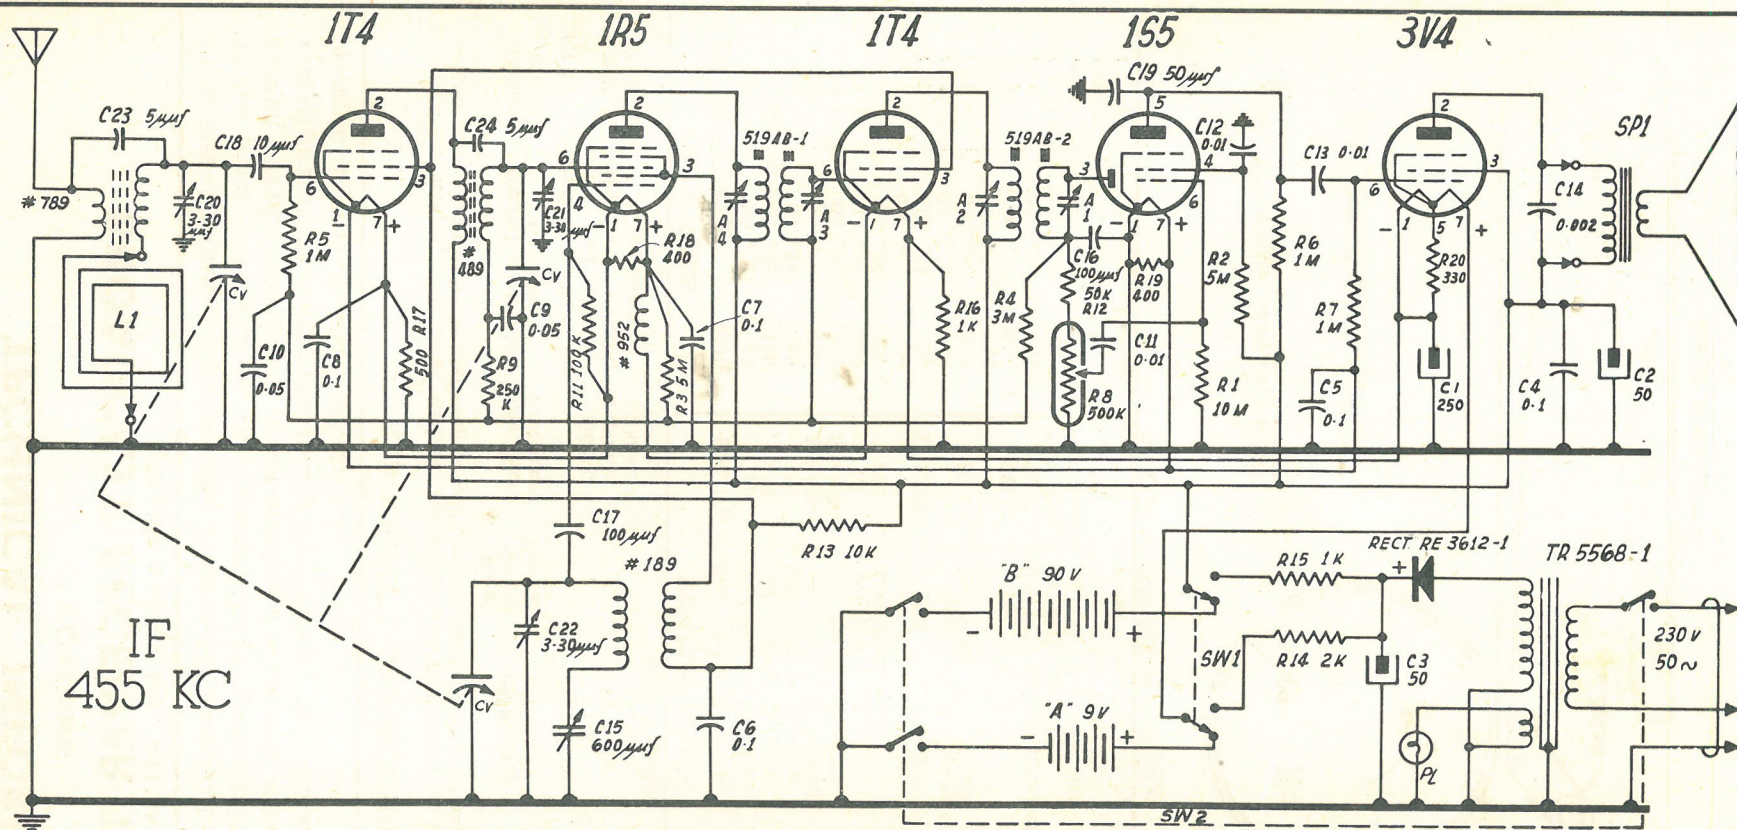

SCHEMATIC DIAGRAM PACEMAKER MODEL 519 A.B.

VOLTAGE READINGS ON AC

Use	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
R.F.	1T4	1.4	90	50	—	1.4	0	2.7	
Conv.	1R5	2.7	90	50	-8	2.7	0	4.2	
I.F.	1T4	4.2	90	50	—	4.2	0	5.6	
Det-AF.	1S5	0	—	0	12	10	0	1.4	
Output	3V4	5.6	86	90	90	6.8	0	8.1	

RESISTANCE READINGS

Use	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
R.F.	1T4	*	3K	13K	—	*	4.5meg.	*	
Conv.	1R5	*	3K	13K	100K	*	3.5meg.	*	
I.F.	1T4	*	3K	13K	—	*	3.5meg.	*	
Det-AF.	1S5	0	—	.55meg.	5meg.	1meg.	10meg.	*	
Output	3V4	*	3K	3K	3K	*	1meg.	*	

1. D.C. voltage measurements are at 2,000 ohm per volt—A.C. voltage measurements at 1,000 ohm per volt.
2. Socket connections are shown as bottom views.
3. Measured values are from socket pin to common negative.
4. Nominal Tolerance on component value make possible a variation of $\pm 10\%$ in voltage and resistance readings.

5. Volume control at maximum, no signal applied for voltage measurements.
6. Resistance readings in B+ circuits may vary widely according to condition of filter capacitors.
7. Voltage and resistance readings taken in A.C. position.
* Do not use ohmmeter to measure filament resistance.

*Note
deal
like*


21 R4E Sept. 1949

SELL IT WITH CONFIDENCE . . .

PACEMAKER

A.C. BATTERY PORTABLE

Model 519AB

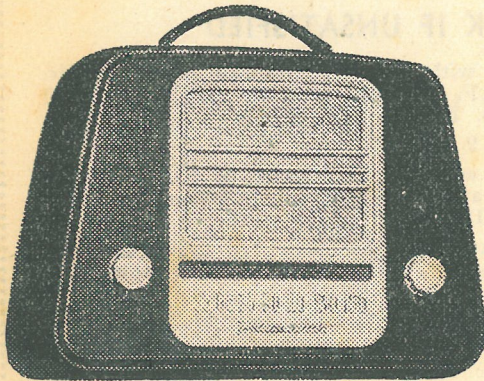

Retail £34/7/6

- Tuned R.F. Stage
- 3-Gang Condenser
- Built-in, Low Impedance Loop
- Static Battery Consumption 11-13 Mil.
- Available in Six Different Colours

Refined covered

H. W. CLARKE LTD. N.Z. DISTRIBUTORS

AUCKLAND

WELLINGTON

CHRISTCHURCH

DUNEDIN