

CURRENT CONSUMPTION

The current consumption of Autocrat Car Radios is remarkably low, and provided battery is in normal condition no strain will be placed on the electrical system.

Six-valve models: Six-volt 4.2 amps.; Twelve volt 2.5 amps.

Eight-valve models: Six volt 4.8 amps.; Twelve volt 2.8 amps. ✓

CONNECTIONS

Connect the tuning unit to the speaker unit by means of the cable supplied. Connect the power supply lead from the tuning unit to the ammeter or any suitable battery connection. Connect aerial to receiver by means of bayonet plug on side of tuning unit, using a shielded aerial lead.


NOISE SUPPRESSION

A distributor suppressor must be fitted in the high-tension lead between the ignition coil and the distributor as close to the distributor as possible.

ALIGNMENT OF AERIAL

Switch on the receiver and allow to warm up, tune to weak signal between 1200 and 1400 kilocycles and peak the aerial trimmer to give maximum performance.

Autocrat Eight Valve Speaker Unit

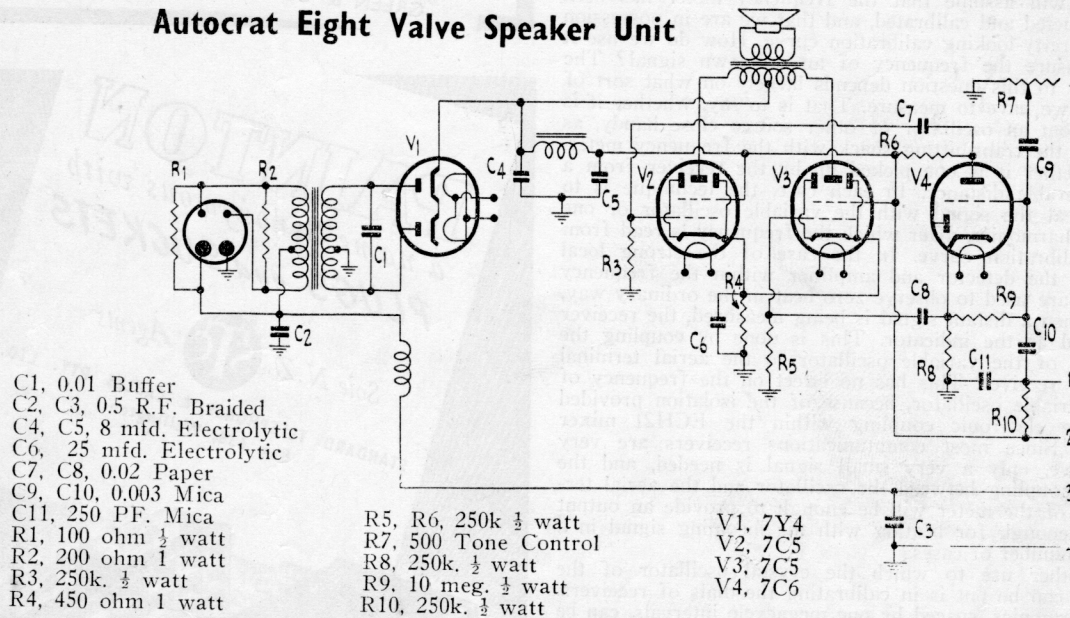

R1 not applicable to 1950 models.

Vibrator socket shown from top.

Manufacturers:

AUTOCRAT RADIO LIMITED

PHONE 48-130

118 VICTORIA STREET, AUCKLAND

Sole New Zealand Distributors: G. A. WOOLLER & CO., LTD., AUCKLAND