


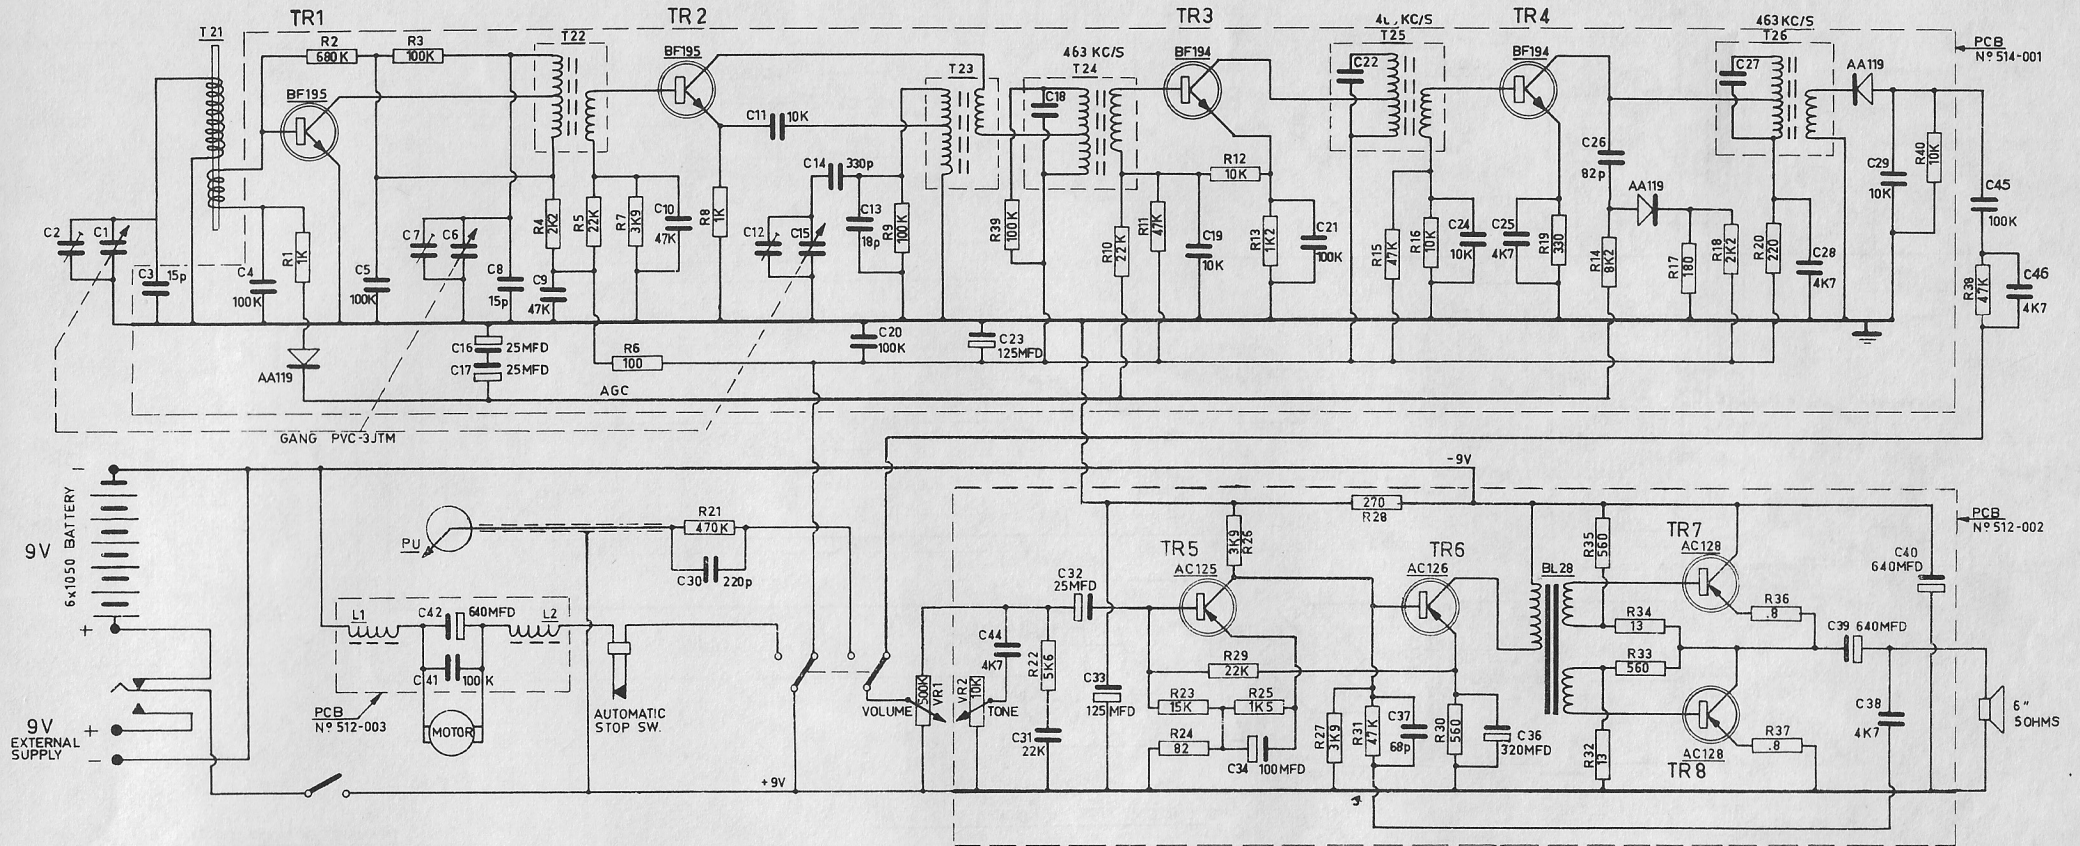

CIRCUIT DIAGRAM


TRANSISTOR	COLLECTOR	BASE	EMITTER	VIEW ONTO PINS OF TRANSRS
TR 1	BF 195	+ 6	+ 0.6	—
TR 2	BF 195	+ 6.8	+ 0.95	+ 0.2
TR 3	BF 194	+ 6.8	+ 1.6	+ 1
TR 4	BF 194	+ 6.8	+ 1	+ 0.4
TR 5	AC 125	- 2.2	- 0.9	- 0.8
TR 6	AC 126	- 8	- 2.2	- 2.1
TR 7	AC 128	- 9	- 4.6	- 4.5
TR 8	AC 128	- 4.5	- 0.1	—

ALL VOLTAGES MEASURED WITH A 40 000 OHMS/VOLT METER UNDER NO SIGNAL CONDITIONS

QUIESCENT CURRENT: APPROX. 19 mA

MOTOR CURRENT: APPROX. 38 mA AT 33 RPM

FREQUENCY COVERAGE: 535 TO 1620 KC/S

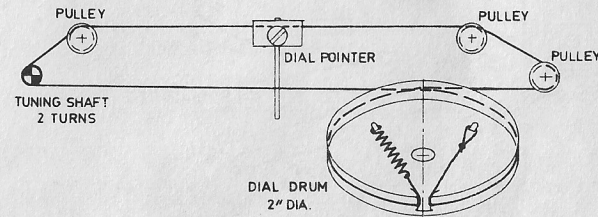

DIAL CORD STRINGING

THIS CHASSIS IS USED ON:

'BELL TEPPAZ' PORT. RADIO RECORD PLAYER

ISSUE	REVISION	DATE	NAME
DATE: 17-11-1967	DRAWN BY: R. Lindberg	CHECKED BY:	
BELL RADIO TELEVISION CO. LTD.			
SERVICE DATA FOR 8 TRG 68			
DRG. N°			515-001