

HIS MASTER'S VOICE



SERVICE SHEET

ISSUED BY SERVICE DIVISION, HIS MASTER'S VOICE (N.Z.) LTD., G.P.O. BOX 108, WELLINGTON

“WESTMINSTER”

**7-VALVE DUAL-WAVE
MODEL 487D.**

VALVE COMPLEMENT

VALVE COMPLEMENT		
(1)	KTW63	R.F. Amplifier
(2)	X65	First Det., Osc.
(3)	KTW63	I.F. Amplifier
(4)	DH63	Second Det., A.V.C.
(5)	KT63	Power Output
(6)	U50	Rectifier
(7)	Y61	Tuning Indicator

FREQUENCY RANGE



FREQUENCY RANGE	
(a) "Broadcast"	520-1600 Kcs.
(b) "Shortwave"	6-18 Mcs.
Intermediate Frequency ..	455 Kcs.

POWER SUPPLY

230 Volts AC.

CABINET

Height 18½in. Width 16in. Depth 11in

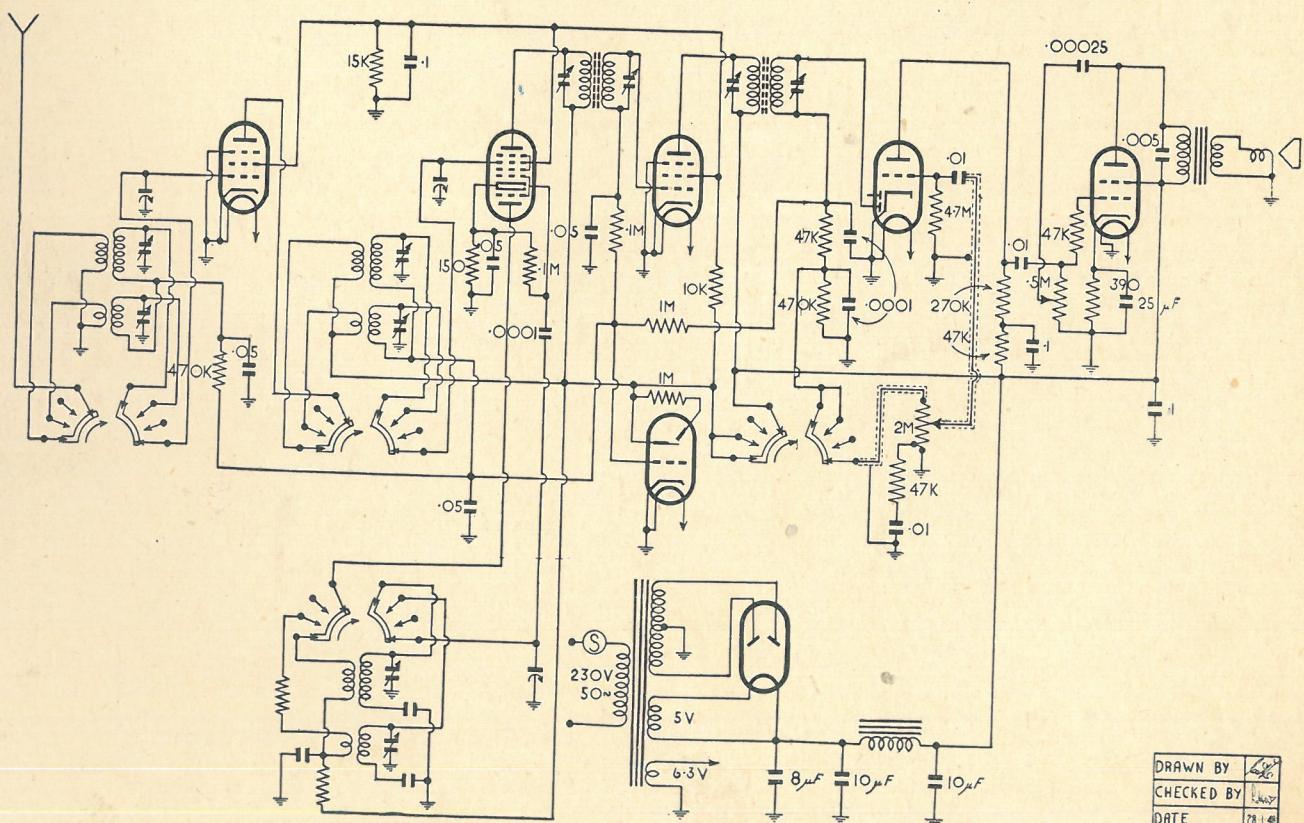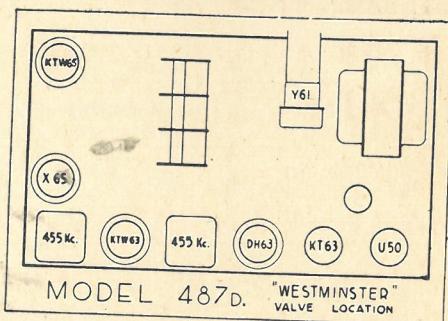

DRAWN BY	<i>John</i>
CHECKED BY	<i>John</i>
DATE	28-1-48

487 D


HIS MASTER'S VOICE



SERVICE SHEET

ISSUED BY SERVICE DIVISION HIS MASTER'S VOICE

STON

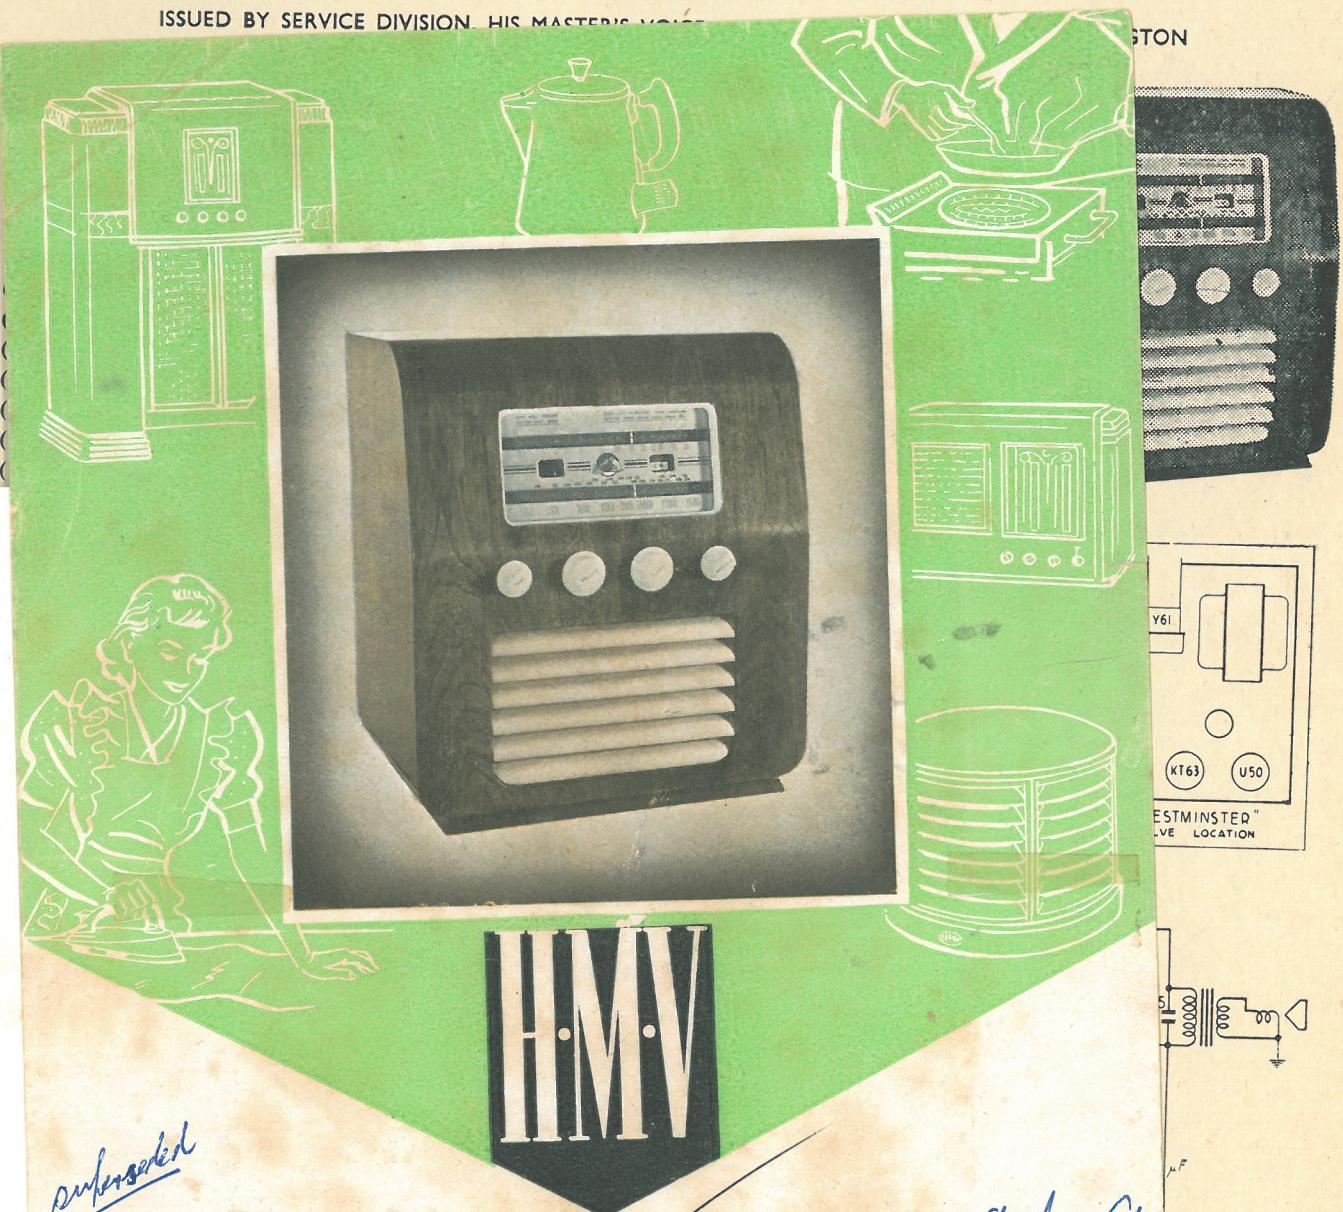

perfected

as in 61

1948

"Westminster" THE 7-VALVE DUAL-WAVE MODEL.

THIS model is a 7-valve all-world receiver incorporating many new features, i.e., a special wave change indicator telling which band is in operation, finger spin tuning, "broad vision" dial, elliptical magic eye, tone compensation, figured walnut speaker. The cabinet is beautifully finished in figured walnut. The cabinet is of generous dimensions and scientific construction, which not only lends dignity to the appearance, but at the same time ensures the high fidelity of tone characteristic of "His Master's Voice."

Model 485D



DRAWN BY	<i>[Signature]</i>
HECKED BY	<i>[Signature]</i>
DATE	28/4/48

487D